


# 产品规格书

建筑照明一体化系列

LR3735




## LR3735

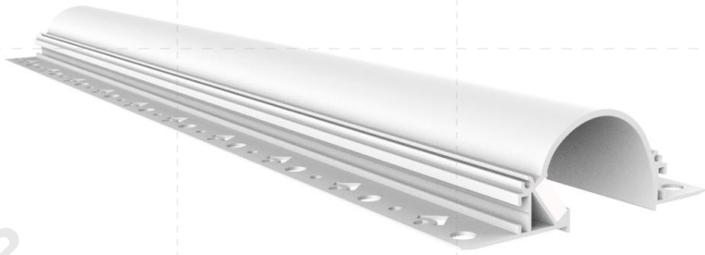

### 基本特征

- 35mm发光面，无边嵌入式安装，与建筑融为一体
- AL6063-T5 铝型材，高品质表面处理
- 间接出光，提供见光不见灯的装饰照明效果

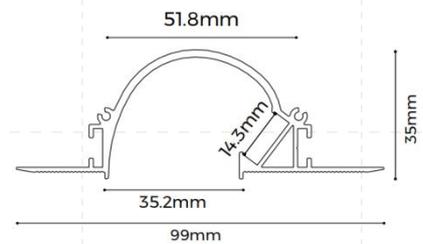

### 标配信息



图示	名称	参数	下单型号
	型材	型材重量: 2.25kg/2.5m 外型尺寸: L2500*W99*H35mm 材料: AL6063-T5 表面工艺: 喷涂	/
	堵头	尺寸: L59.8*W35*H2mm 材质: AL	LR3735

### 选配信息


图示	名称	参数	下单型号
	软板模组 D8168-24V-10mm	材质: FPC, 色温: 1900/2300/2700/3000/3500/4000/5000/6000K; 显指 > 90/> 95; 电压: 24V; 功率: 16.2W/m; 流 明: 1860lm/m; 板宽: 10mm; 最小裁剪单元: 7LEDs/42mm;	D8168-24V- 10mm
	螺丝	尺寸: M3.5*40mm 材质: 碳钢	CL-01

### 光学参数

1M 灯具测试 ( 配 D8S120-24V-12mm 光源 )

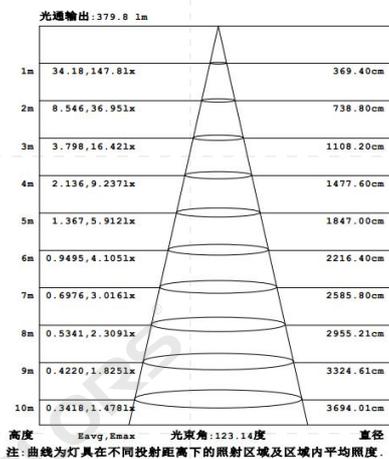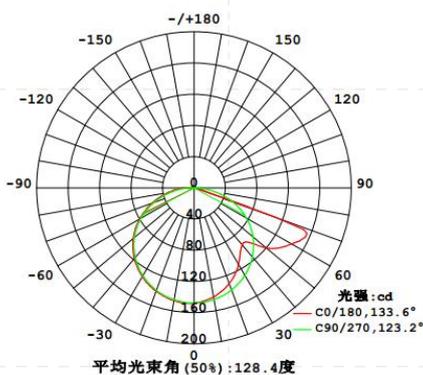

包装信息

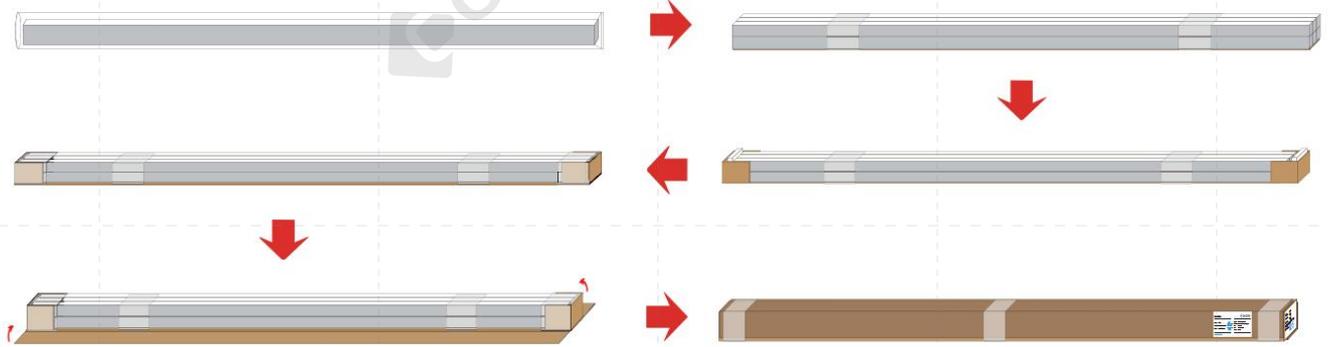

部件	包材类型	尺寸(mm)	净重(kg)	毛重(kg)	装箱数量
型材面罩组件	包装纸箱	2580*270*115mm	12.87	15.87	6pcs/box

