


产品规格书

建筑照明一体化系列

LR3924




LR3924

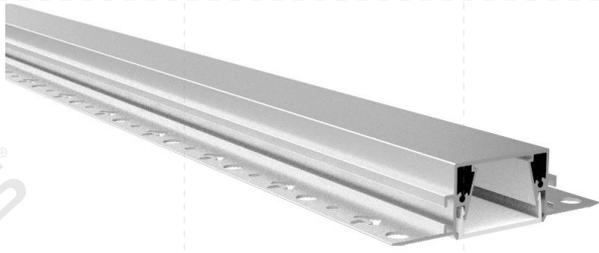

基本特征

- 35mm 发光面，无边嵌入式安装，与建筑融为一体
- 德国进口 PC 面罩，出光均匀柔和
- AL6063-T5 铝型材，高品质表面处理

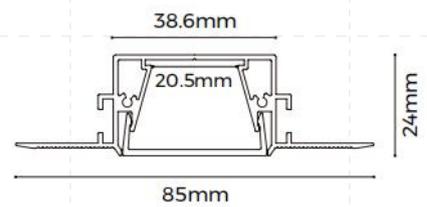

标配信息



图示	名称	参数	下单型号
	型材	型材重量: 1.6kg/2.5m 外型尺寸: L2500*W85*H24mm 材料: AL6063-T5 表面工艺: 碱砂银色氧化	/
	面罩	款型: 磨砂扩散 材料: PC 透光率: 70% 外形尺寸: L2500*W34.2*H10.2mm PC 特性: 温度每上升(下降) 10°C, 面罩会延伸(收缩) 0.8mm/m.	/
	堵头	L38.6*W24*H2mm 材质: AL	EC-LR3924

选配信息


图示	名称	参数	下单型号
	软板模组 D8280-24V-20mm	材质: FPC, 色温: 1900/2300/2700/3000/3500/4000/5000/6000K ; 显指 > 80/>95; 电压: 24V; 功率: 20W/m; 流 明: 2700Lm/m; 板宽: 23mm; 最小裁剪单元: 14LEDs/50mm;	D8280-24V- 20mm
	螺丝	M3.5*40mm 材质: 碳钢	CL-01

光学参数

1M 灯具测试 (配 D8280-24V-20mm 光源, 扩散面罩)

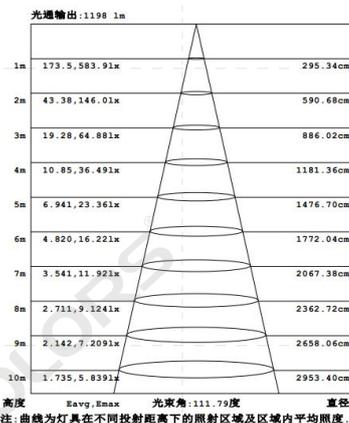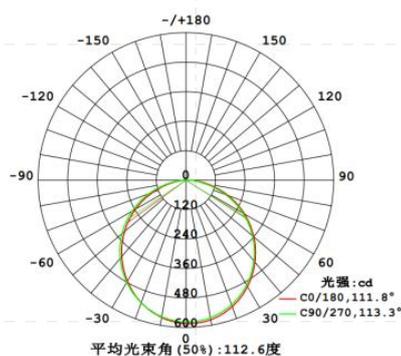

包装信息

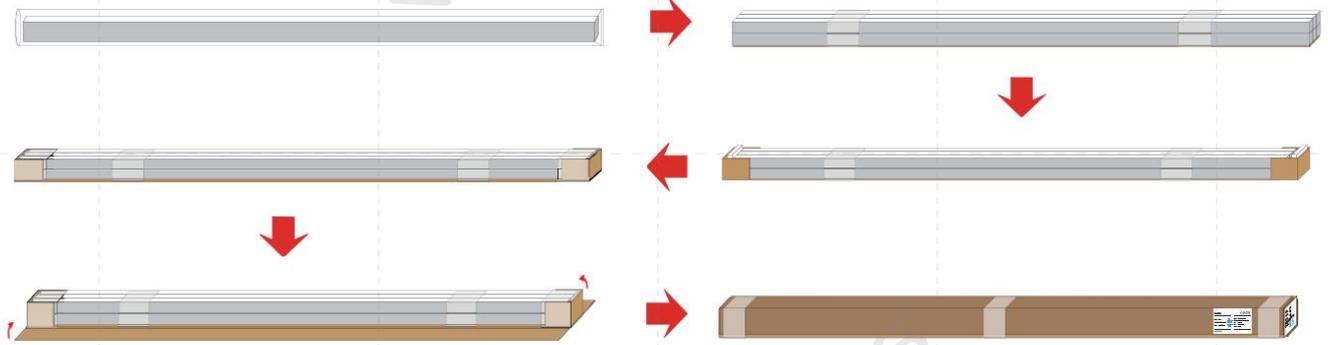

部件	包材类型	尺寸(mm)	净重(kg)	毛重(kg)	装箱数量
型材面罩组件	包装纸箱	2580*200*175mm	18.94	21.94	12pcs/box

