

# 产品规格书

建筑照明一体化系列

LE2711




## LE2711



### 基本特征


- IP65防水级设计，可应用于室内外潮湿环境
- 超薄设计，适用于室内地板，勾勒轮廓，点缀装饰
- AL6063-T5 铝型材，高品质表面处理
- 应用于地板，与建筑融为一体



## 标配信息



图示	名称	参数	下单型号
	型材	型材重量: 0.76kg/2.5m 外型尺寸: L2500*W27*H11mm 材料: AL6063-T5 表面工艺: 碱砂银色氧化	/
	面罩	款型: 磨砂扩散 材料: PC 透光率: 75% 外形尺寸: L2500*W18*H3.4mm PC 特性: 温度每上升(下降) 10°C, 面罩会延伸(收缩) 0.8mm/m.	/
	无孔堵头	尺寸: L27*W11*H7.8mm 材质: 防火 PC	EC-LE2711

## 选配信息


图示	名称	参数	下单型号
	软板模组 D8168-24V-10mm	材质: FPC, 色温: 1900/2300/2700/3000/3500/4000/5000/6000K; 显指 > 90/>95; 电压: 24V; 功率: 16.2W/m; 流 明: 1860lm/m; 板宽: 10mm; 最小裁剪单元: 7LEDs/42mm;	D8168-24V- 10mm
	有孔堵头	尺寸: L27*W11*H7.8mm 材质: 防火 PC	EC-LE2711

## 光学参数

1M 灯具测试 (配 D8168-24V-10mm 光源, 扩散面罩)

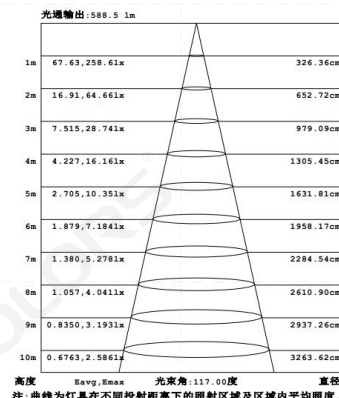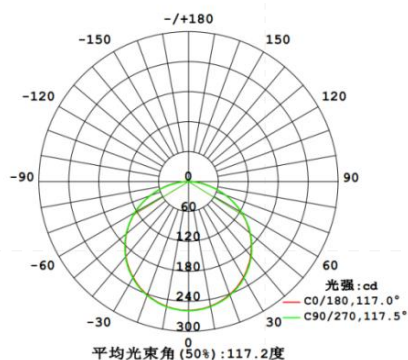

包装信息

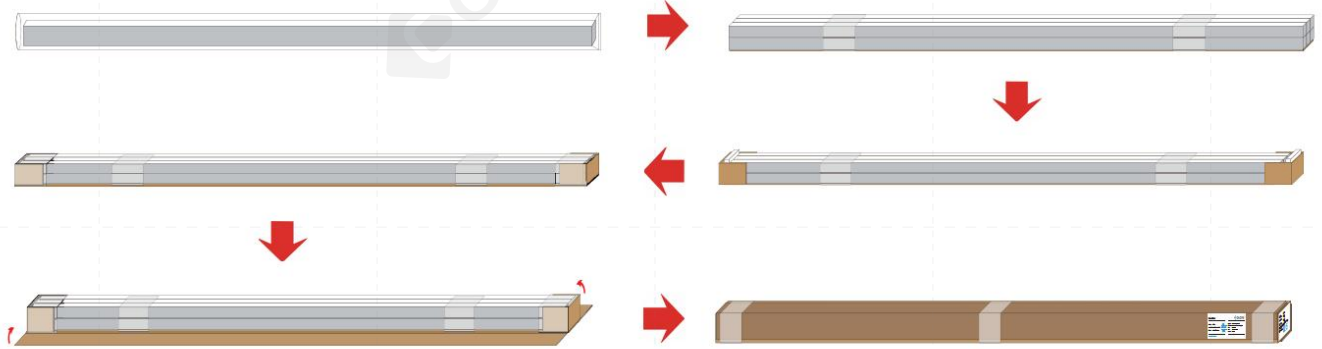

部件	包材类型	尺寸(mm)	净重(kg)	毛重(kg)	装箱数量
型材面罩组件	包装纸箱	2580*173*140mm	21.6	24.6	24pcs/box

