

ALS

ALS Series, min. to 5mm in width, is designed for linear lights to perfectly fit into architectural settings such as plastered line, skirting board, corner, wall edge and floor etc. to achieve integrated lighting, full light look but in small profile.

Product Overview

Ceiling

Pendant

Recessed

Trimless-Recessed

Corner

Vario

LS0709



7.6x9MM

LS0812



7.8x12MM

LS3535



35x35MM

LE1212



12x12MM

LE1410




14x10MM

LR0812



47.8x12MM

LR1613



56x13MM

LS1010



10x10MM

LS1510




15x10MM

LS5050



50x50MM

LE1910



19x10MM

LE2409



24x9MM

LR2013



60x13MM

LR2522



65x22MM

LG1616C(N)



16x16MM

LG1616K(N)



16x16MM

LS1607



16x7MM

LS1613



16x13MM

LH25100



25x100MM

LE2507



25x7MM

LE2513



25x13MM

LR3735



99x35MM

LR3924



85x24MM

LG2020C




20x20MM

LG3030C



30x30MM

SK6013(B)



60x13.2MM

LS1612L



16x18MM

LS1911C



19.7x19.6MM

LT30



30x30MM

LE3523



35x23MM

LR5535(A)



95x35MM

LR5535(B)



93x35MM

SK8513(B)



85x13.2MM

LS1911K




19.7x19.7MM

LS2013




20x13MM

LT60



60x60MM

LS2126



21.4x27MM

LS2020



20x20MM

LS2522



25x22.5MM



LE2711



27.1x11MM



LS0709

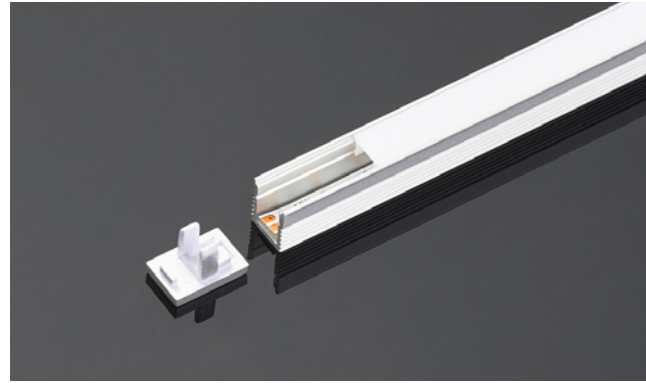

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W7.6×H9mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LS0709 L8×W7.6×H9mm	



Installation Accessories

Ceiling clip	CP-03 L15×W9.2×H4.5mm	
--------------	--------------------------	--



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000×4×12mm	140LEDs	7LEDs/50mm

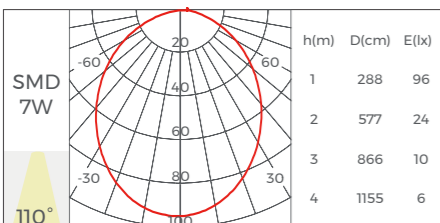

LS0812

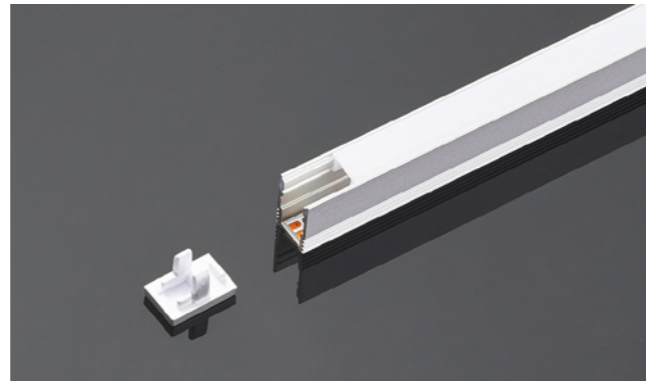

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W7.8×H12mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LS0812 L8×W7.8×H12mm	
End cap with hole	EC-LS0812 L8×W7.8×H12mm	



Installation Accessories

Ceiling clip	CP-03 L15×W9.2×H4.5mm	
--------------	--------------------------	--



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000×4×12mm	140LEDs	7LEDs/50mm

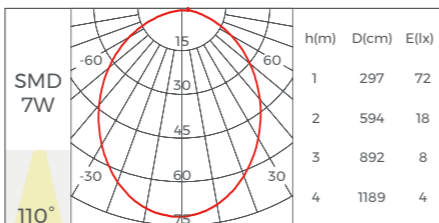

LS1010

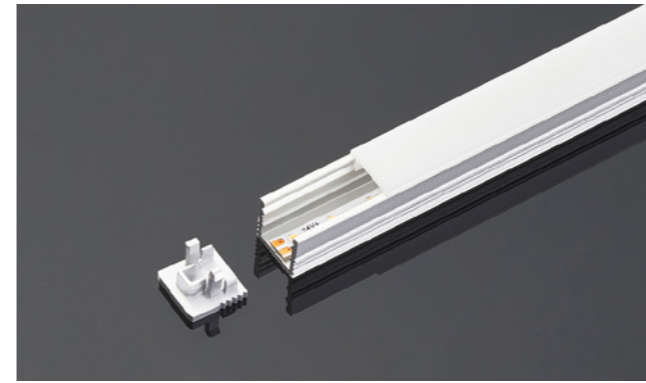

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W10×H10mm	
Diffuser	L2500×W9.43×H3.06mm	
Black Diffuser	CV-LS1010 L2500×W9.43×H3.06mm	
Holeless end caps	EC-LS1010 L10×W10×H8mm	
End cap with hole	EC-LS1010 L10×W10×H8mm	



Installation Accessories

Ceiling clip	CP-36 L2×W15×H4.5mm	
--------------	------------------------	--



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×12mm	140LEDs	7LEDs/50mm

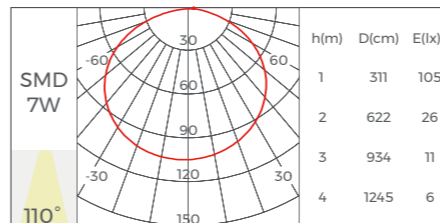

LS1510

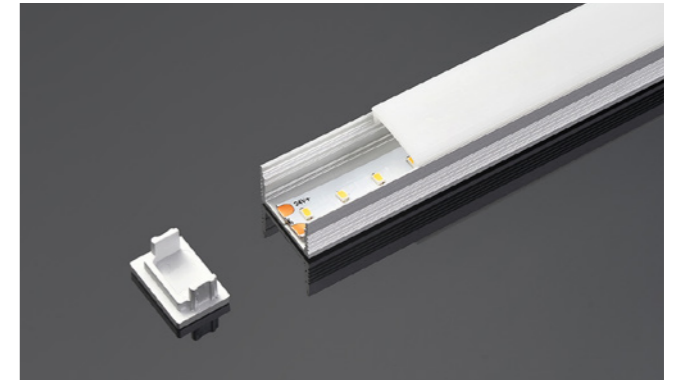

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W15×H10mm	
Diffuser	L2500×W14.4×H3mm	
Black Diffuser	CV-LS1510 L2500×W14.4×H3mm	
Holeless end caps	EC-LS1510 L15×W10×H8mm	
End cap with hole	EC-LS1510 L15×W10×H8mm	



Installation Accessories

Ceiling clip	CP-37 L17×W15×H4.5mm	
--------------	-------------------------	--


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×12mm	140LEDs	7LEDs/50mm

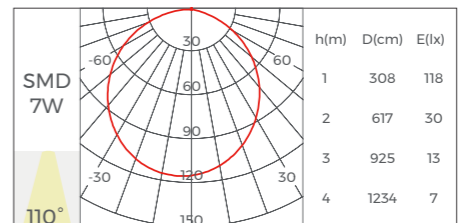

LS1607



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W16×H7mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS1607 L6×W16×H7mm	
End cap with hole	EC-LS1607 L6×W16×H7mm	



Installation Accessories

Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m	24V	15W/m	5000×8×1.3mm	280LEDs	7LEDs/25mm

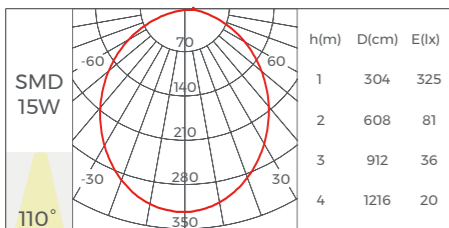

LS1613



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W16×H13mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS1613 L7×W16×H13mm	
End cap with hole	EC-LS1613 L7×W16×H13mm	


Installation Accessories

Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×1.2mm	140LEDs	7LEDs/50mm

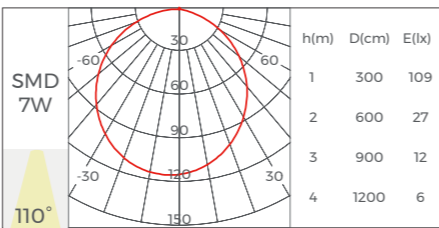

LS1612L



Profile Components

Profile	L2500×W16×H12mm	
Diffuser	L2500×W14.7×H4.5mm	
Holeless end caps	EC-LS1612L L16×W7×H18mm	
End cap with hole	EC-LS1612L L16×W7×H18mm	



Installation Accessories

Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	

Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm

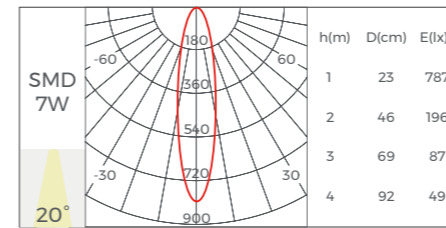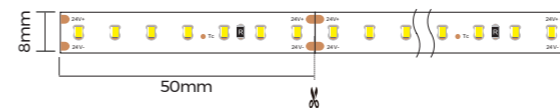


Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

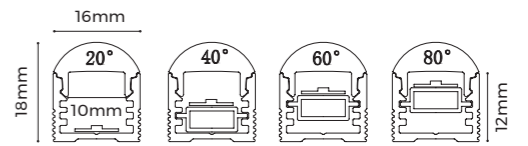

Structure image

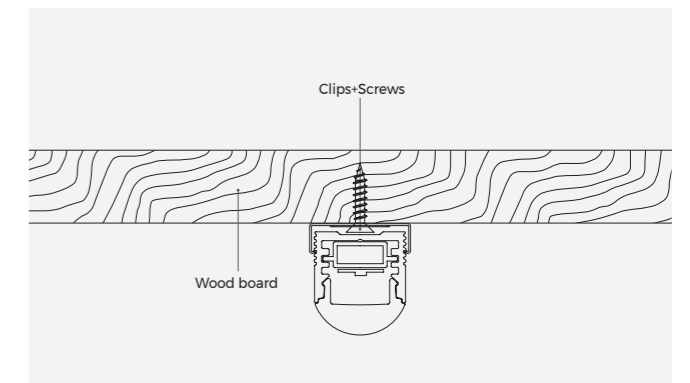

Effect image



LS1911C



Basic Parameters

Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W197×H11.1mm	
Diffuser	L2500×W197×H10.6mm	
Holeless end caps	EC-LS1911C L19.7×W19.7×H5mm	
End cap with hole	EC-LS1911C L19.7×W19.7×H5mm	

Installation Accessories

Ceiling clip	CP-07 38×15×4.5mm	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	




Standard extenders

180° "L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	
---	---	--


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm

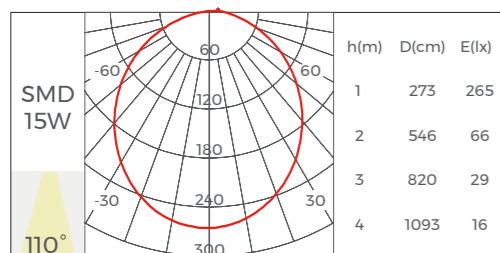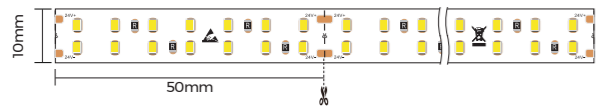

Structure image

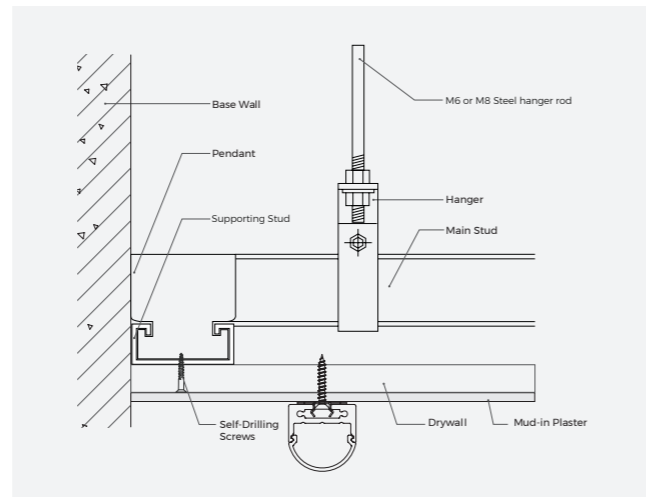

Effect image



LS1911K



Basic Parameters

Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W197×H11.1mm	
Diffuser	L2500×W197×H10.6mm	
Holeless end caps	EC-LS1911K L19.7×W19.7×H5mm	
End cap with hole	EC-LS1911K L19.7×W19.7×H5mm	

Installation Accessories

Ceiling clip	CP-07 38×15×4.5mm	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	




Standard extenders

180° "L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	
---	---	--


Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm

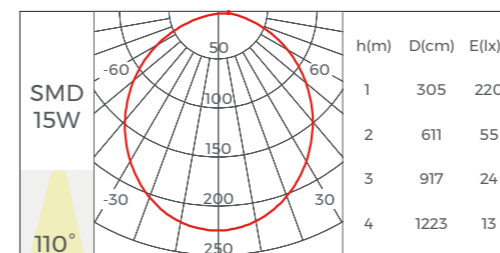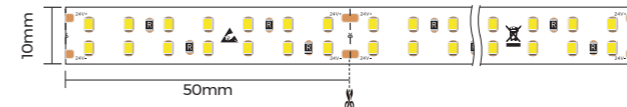


Structure image

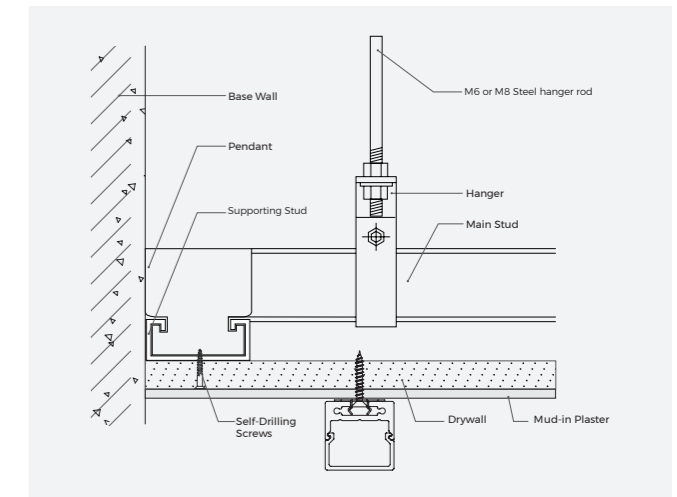

Effect image

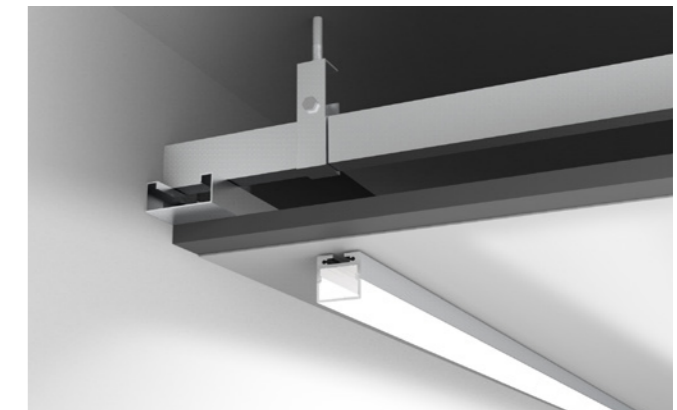

LS2013



Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W20×H13mm	
Diffuser	L2500×W14.7×H4.3mm	
White Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS2013 L20×W13×H4.5mm	
End cap with hole	EC-LS2013 L20×W13×H4.5mm	



Installation Accessories

Ceiling clip	CP-08 21.8X12X6.4mm	
--------------	------------------------	--


Light Source

Flexible Strip	
----------------	--

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x1.2mm	280LEDs	14LEDs/50mm

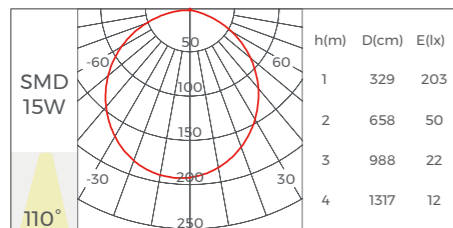

LS2020



Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W20×H20mm	
Diffuser	L2500×W14.7×H4.3mm	
Prismatic Diffuser	CV-LR2013 L2500×W14.7×H4.3mm	
Black Diffuser	CV-LR2013 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS2020 L20×W20×H4.5mm	
End cap with hole	EC-LS2020 L20×W20×H4.5mm	



Installation Accessories

Ceiling clip	CP-08 21.8X12X6.4mm	
--------------	------------------------	--

Light Source

Flexible Strip	
----------------	--

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x1.2mm	280LEDs	14LEDs/50mm

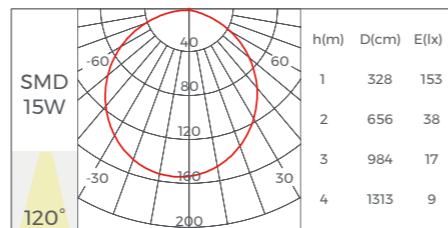

LS2522



Profile Components

Profile	L2500*W25*H22.5mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LS25 L25.1*W22.5*H6.5mm	



Installation Accessories

Whole luminaire splicing bars	EX-29 105*23*8.1mm	
Splicing bars	EX-31 100*15.5*2mm	
Pendant Accessory	PE-I	
Pendant Accessory	PE-J	
Ceiling Accessory	CL-16 64.5*24.5*5mm	
Power box 100w Non dimming	PB-02 574*25*50mm	
Power box 100w 1-10v dimming	PB-04 574*35*60mm	

Light Source


Flexible Strip	
----------------	--

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DS8160(A)-24V-10mm	>80	2900LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/50mm
DY830-24V-14mm	>80	2400LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/PCS	6LEDs/1077mm

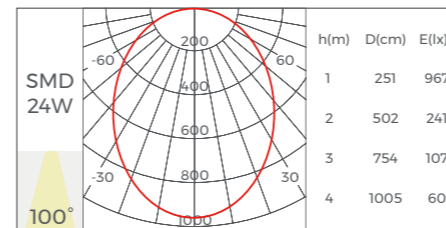

Basic Parameters

Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Cover Accessories



Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L1077*W19.5*H15mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	

Corner Accessories

L-shaped	L90-LS25 277X277X22mm	
T-shaped	T90-LS25 529X277X22mm	
X-shaped	X90-LS25 529X529X22mm	

* All corners are available in with/without light source.

LS3535

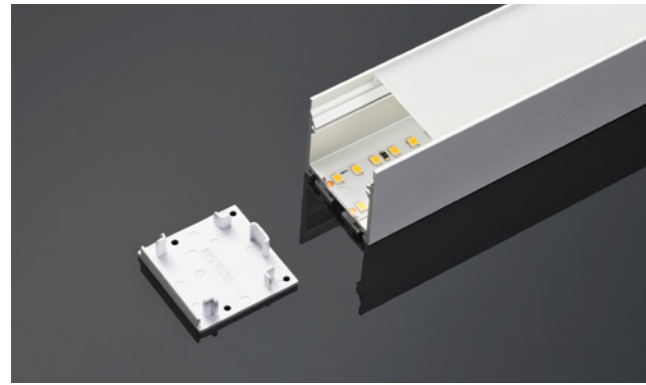

Basic Parameters

Installation	Ceiling, Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW35XH35mm
Diffuser	L2500XW32.8XH51mm
Holeless end caps	EC-LS3535 L35XW35XH9mm

Installation Accessories



Ceiling clip	CP-15 L24.6XW20XH6.2mm
Pendant Cable (with junction box)	PY-D
Pendant Cable	PN-D
Splicing Bar	EX-09 L1000XW13.32XH2.65mm

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M	24V	20W/M	2500x20x1.5mm	280LEDs	14LEDs/50mm

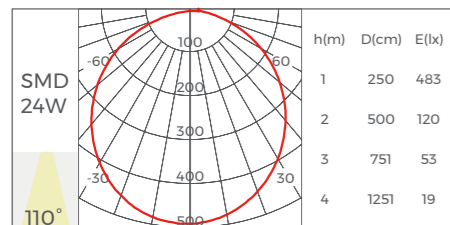

LS5050

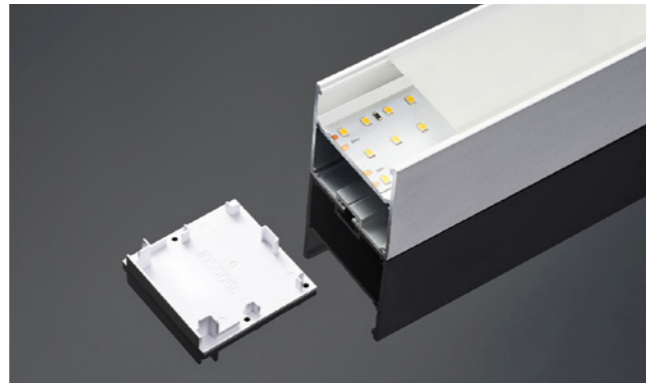

Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components



Profile	L2500XW50XH50mm
Diffuser	L2500XW44.7XH61mm
Holeless end caps	EC-LS5050(N) L50XW50XH12mm

Installation Accessories

Pendant Cable (with junction box)	PY-D
Pendant Cable	PN-D
Pendant Rod	PG-I
Splicing Bar	EX-11 L400XW45.6XH21.4mm

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500X34X1.5mm	280LEDs	14LEDs/50mm

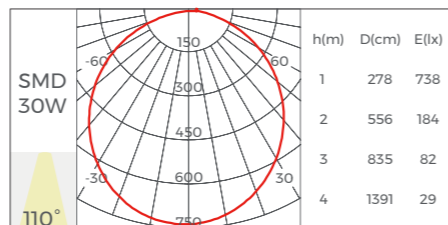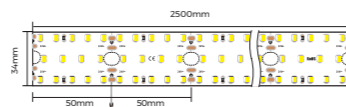

LH25100





Profile Components	
Profile	L2500*W25*H100mm
Diffuser	L2500*W20.4*H6.7mm
Holeless end caps	EC-LH25 L100*W20*H10.5mm

Installation Accessories

Splicing bars	EX-30 80*22*15mm
Pendant Accessory	PE-H
Pendant Accessory	PE-G
Power box 100w Non dimming	PB-02 574*25*50mm
Power box 100w 1-10v dimming	PB-04 574*35*60mm


Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/PCS	6LEDs/1077mm

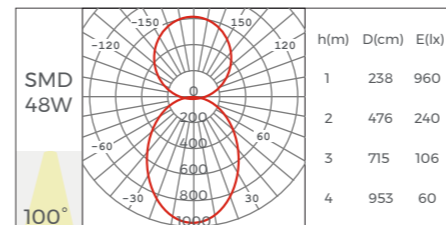

Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

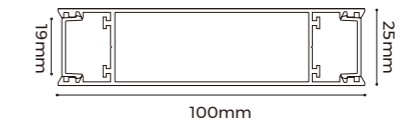

Cover Accessories



Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm
Grating	CV-LS25G L1077*W19.5*H15.0mm
Asymmetric	CV-LS25LA L2500*W22*H7.5mm
Blind	CV-LS25FB L2500*W20.4*H6.7mm

Corner Accessories

L-shaped	L90-LH25 277X277X100mm
T-shaped	T90-LH25 529X277X100mm
X-shaped	X90-LH25 529X529X100mm

* All corners are available in with/without light source.

LT30

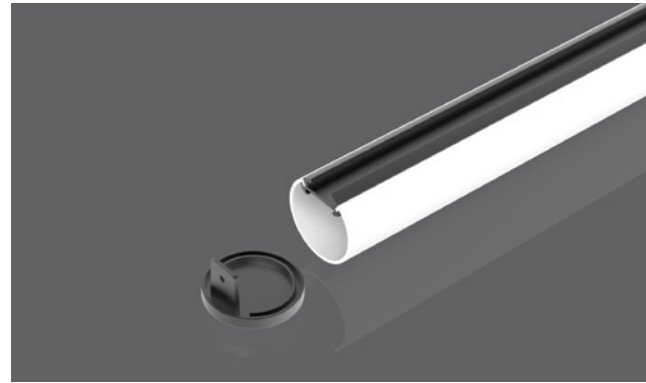

Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W19.5×H7.4mm	
Diffuser	L2500×Φ30×H26.8mm	
Holeless end caps	EC-LT30 Φ32.5×H2.4mm	

Installation Accessories



Pendant cable (Wire and cable in one)	PE-A	
Pendant Cable	PN-Y	

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	7LEDs/42mm



LT60

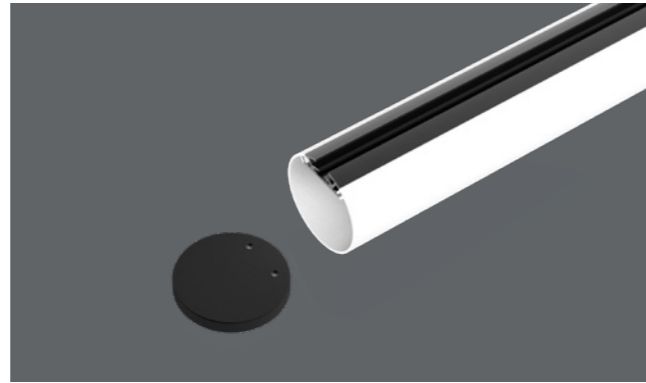

Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components



Profile	L2500×W35.2×H11mm	
Diffuser	L2500×Φ60×H55.6mm	
Holeless end caps	EC-LT60 Φ63.4×H8mm	

Installation Accessories



Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
180° extender	EX-09 L1000×W13.3×H2.6mm	

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M	24V	20W/M	2500x20x1.5mm	280LEDs	14LEDs/50mm

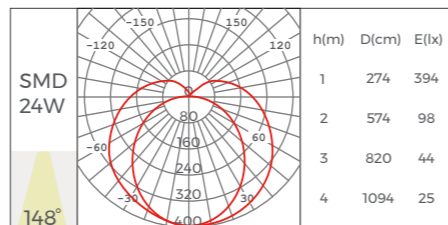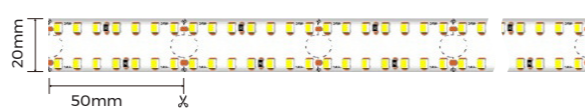

LE1212

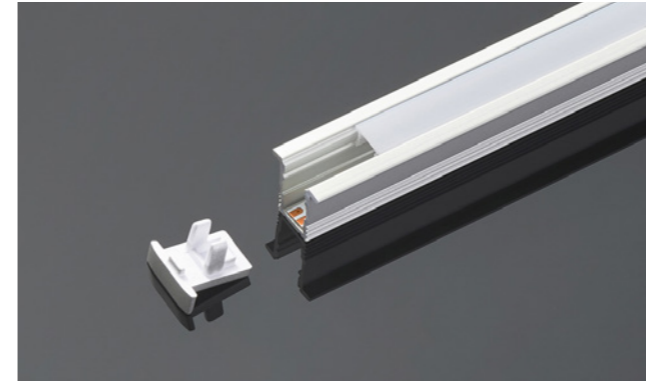

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components



Profile	L2500×W12×H12mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LE1212 L12×W12×H10mm	
End cap with hole	EC-LE1212 L12×W12×H10mm	

Installation Accessories



Embedded clip	CP-T1 25×13×9.5mm	
---------------	----------------------	--

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000×4×1.2mm	140LEDs	7LEDs/50mm

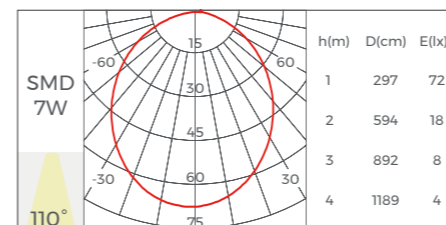

LE1410

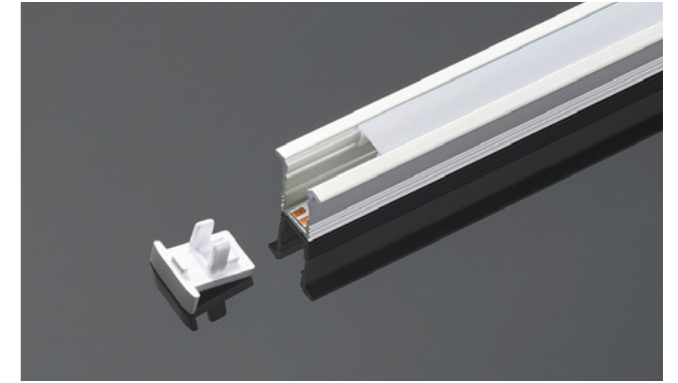

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components



Profile	L2500×W14×H10mm	
Diffuser	L2500×W9.43×H3.06mm	
Black Prismatic	CV-LS1010 L2500×W9.43×H3.06mm	
Holeless end caps	EC-LE1410 L14×W10×H8mm	
End cap with hole	EC-LE1410 L14×W10×H8mm	

Installation Accessories



Embedded Clips	CP-38 L15.3×W24×H8mm	
----------------	-------------------------	--

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×1.2mm	140LEDs	7LEDs/50mm

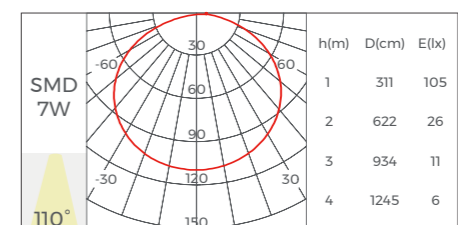

LE1910

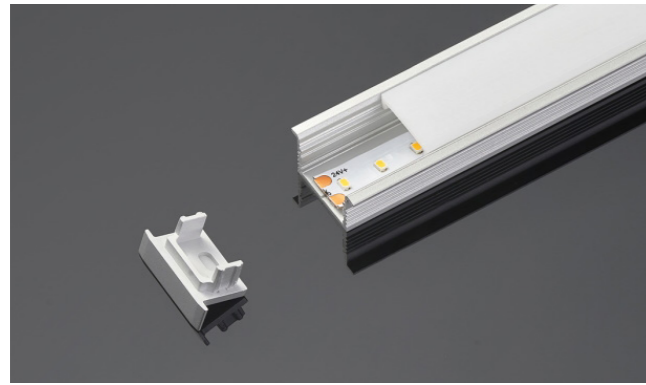

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500xW19xH10mm	
Diffuser	L2500xW14.43xH3mm	
Black Diffuser	CV-LS1510 L2500xW14.43xH3mm	
Holeless end caps	EC-LE1910 L19xW10xH8mm	
End cap with hole	EC-LE1910 L19xW10xH8mm	



Installation Accessories

Embedded clip	CP-39 L24xW20.79xH8.5mm	
---------------	----------------------------	--


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000x8x12mm	140LEDs	7LEDs/50mm

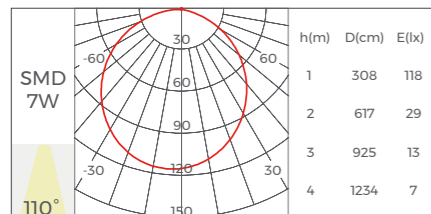

LE2409

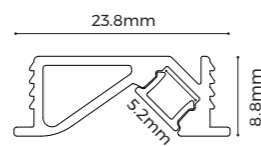

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White



Profile Components

Profile	L2500xW23.8xH8.8mm	
Diffuser	CV-LR0812 L2500xW6.4xH3.7mm	
Black Diffuser	CV-LR0812 L2500xW6.4xH3.7mm	
End cap	EC-LE2409 L23.8xW8.8xH14mm	
End cap with hole	EC-LE2409 L23.8xW8.8xH14mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000x4x12mm	140LEDs	7LEDs/50mm

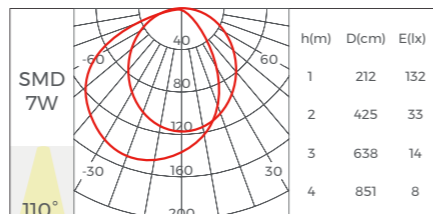

LE2507



Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White



Profile Components

Profile	L2500xW25xH7mm	
Diffuser	L2500xW14.6xH4.5mm	
White Prismatic	CV-LR1613 L2500xW14.7xH4.3mm	
Black Prismatic	CV-LR1613 L2500xW14.7xH4.3mm	
Holeless end caps	EC-LE2507 L25xW7xH10mm	
End cap with hole	EC-LE2507 L25xW7xH10mm	



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m	24V	15W/m	5000x8x13mm	280LEDs	7LEDs/25mm

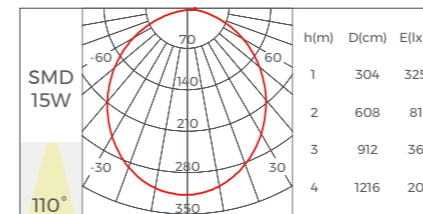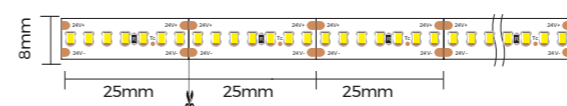

LE2513

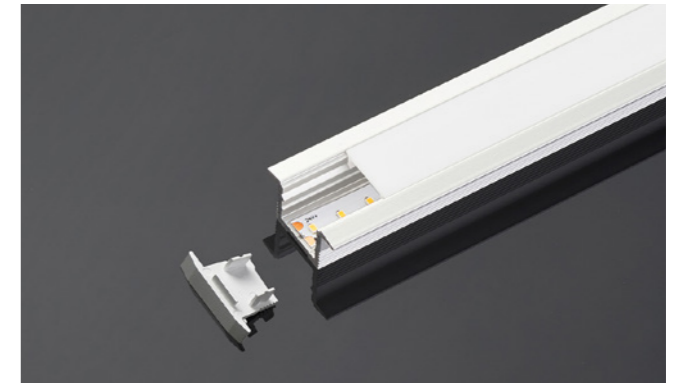

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500xW25xH13mm	
Diffuser	L2500xW14.7xH4.5mm	
White Prismatic	CV-LR1613 L2500xW14.7xH4.3mm	
Black Prismatic	CV-LR1613 L2500xW14.7xH4.3mm	
Holeless end caps	EC-LE2513 L25xW13xH11mm	
End cap with hole	EC-LE2513 L25xW13xH11mm	



Installation Accessories

Embedded clip	CP-12 21.79x20x11mm	
---------------	------------------------	--


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000x8x12mm	140LEDs	7LEDs/50mm

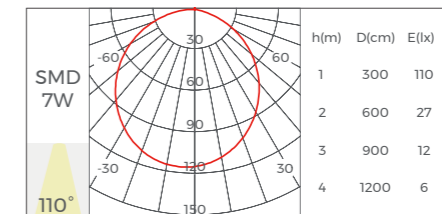

LE3523

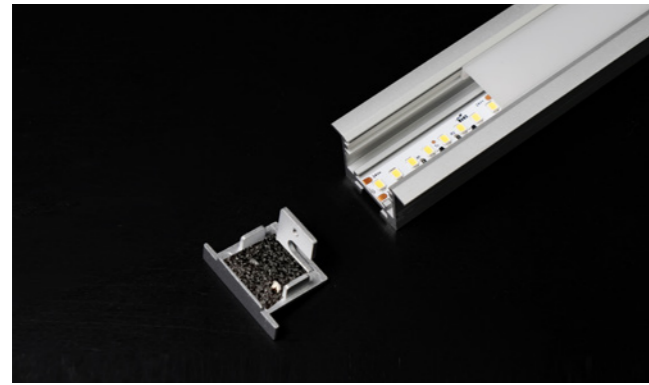

Profile Components


Profile	L2500×W35×H23mm	
Diffuser	L2500×W20.4×H6.7mm	
Holeless end caps	EC-LE25 L35×W23×H21.5mm	

Installation Accessories

Splicing bars	EX-31 100×15.5×2mm	
Recessed Accessory	RE-14 24×16.3×15mm	


Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/PCS	6LEDs/1077mm



Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach




Cover Accessories

Prismatic Diffuser	CV-LS25FP L2500×W20.4×H6.7mm	
Grating	CV-LS25G L1077×W19.5×H15mm	
Asymmetric	CV-LS25LA L2500×W22×H7.5mm	
Blind	CV-LS25FB L2500×W20.4×H6.7mm	


Corner Accessories

L-shaped	L90-LE25 277X277X23mm	
T-shaped	T90-LE25 529X277X23mm	
X-shaped	X90-LE25 529X529X23mm	

* All corners are available in with/without light source.

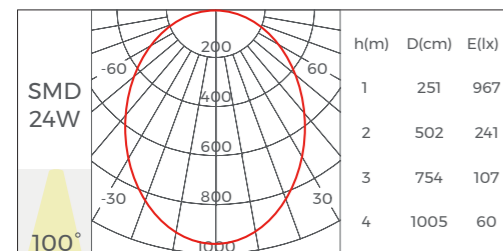

LR0812

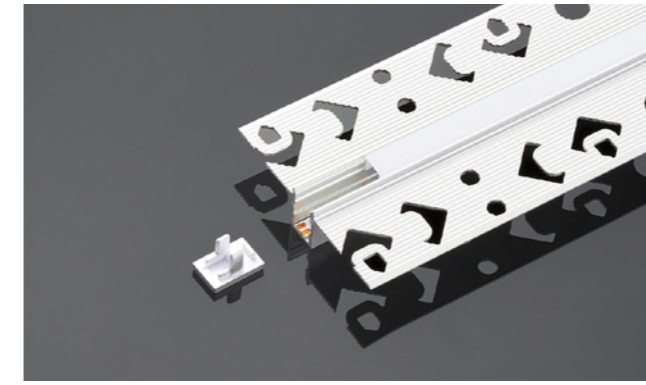

Profile Components


Profile	L2500×W47.8×H12mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LR0812 L8×W7.8×H12mm	
End cap with hole	EC-LR0812 L8×W7.8×H12mm	

Installation Accessories

Screw	CL-01 M3.5X40mm	
-------	--------------------	--


Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000×4×1.2mm	140LEDs	7LEDs/50mm




Basic Parameters


Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

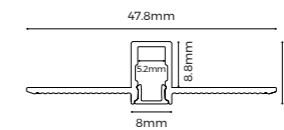


Structure image

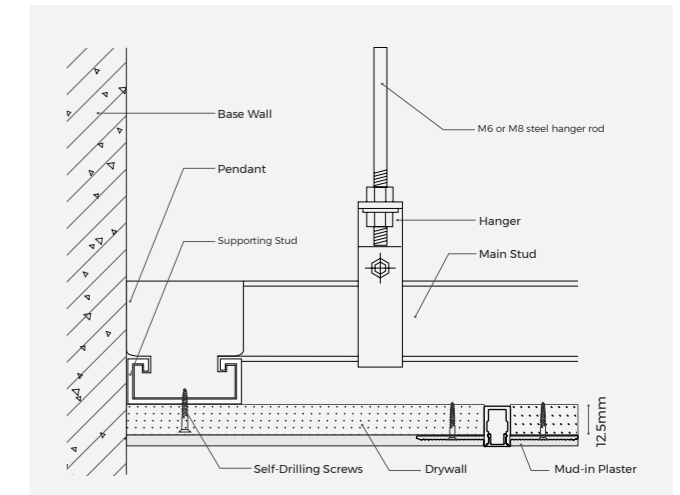

Effect image

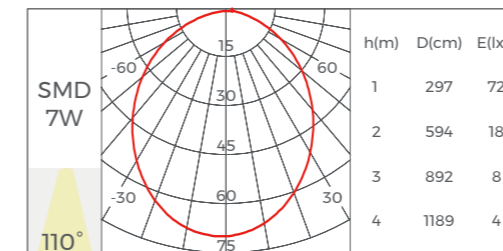

LR1613

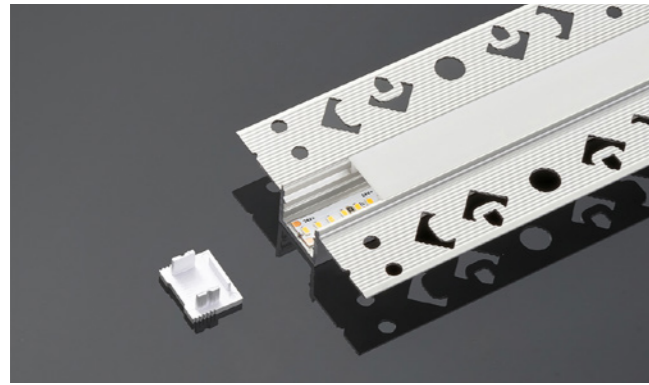


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W56×H13mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LR1613 L7×W16×H13mm	
End cap with hole	EC-LR1613 L7×W16×H13mm	

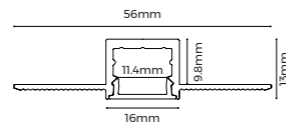


Installation Accessories


Screw	CL-01 M3.5×40mm	
-------	--------------------	--

Light Source


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×12mm	140LEDs	7LEDs/50mm



Structure image

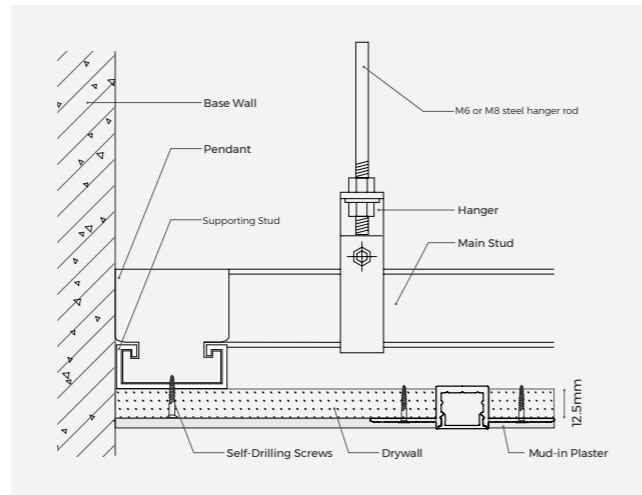

Effect image

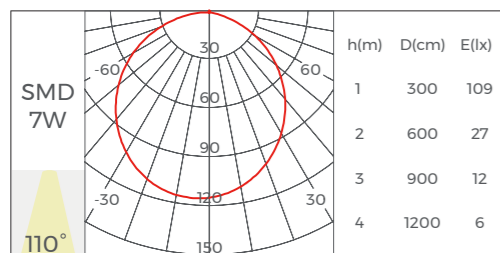

LR2013




Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W60×H13mm	
Diffuser	L2500×W14.7×H4.3mm	
White Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LR2013 L20×W13×H4.5mm	
End cap with hole	EC-LR2013 L20×W13×H4.5mm	

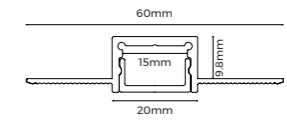


Installation Accessories


Screw	CL-01 M3.5×40mm	
-------	--------------------	--

Light Source


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x12mm	280LEDs	14LEDs/50mm

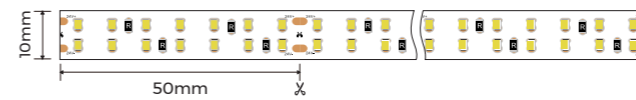


Structure image

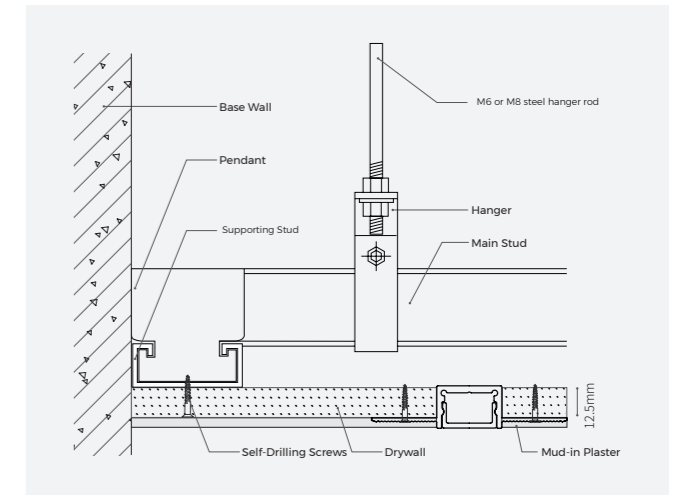

Effect image

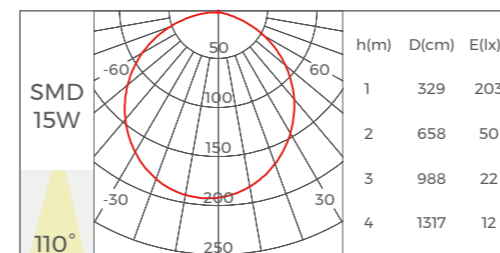

LR2522

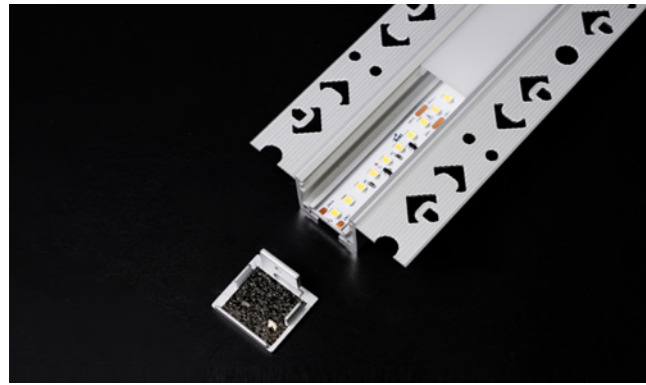


Profile Components

Profile	L2500*W65*H22.5mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LS25 L251*W22.5*H16.5mm	

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


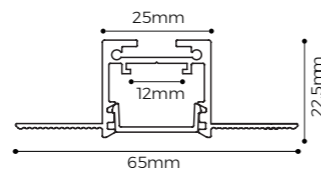


Installation Accessories

Screw	CL-01 M3.5x40mm	
Splicing bars	EX-31 100*15.5*2mm	

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80	2900LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/50mm
DY830-24V-14mm	>80	2400LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/PCS	6LEDs/1077mm

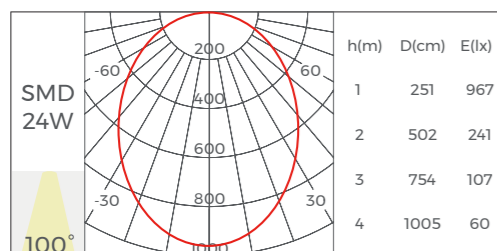

LR3735




Profile Components

Profile	L2500*W99*H35mm	
Holeless end caps	EC-LR3735 L59.8*W35*H2mm	

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

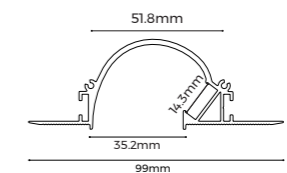


Installation Accessories

Screw	CL-01 M3.5x40mm	
-------	--------------------	--

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	7LEDs/42mm



Cover Accessories

Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L1077*W19.5*H15mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	


Corner Accessories

L-shaped	L90-LR25 277X277X22.5mm	
T-shaped	T90-LR25 529X277X22.5mm	
X-shaped	X90-LR25 529X529X22.5mm	


* All corners are available in with/without light source.

Installation Accessories


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	7LEDs/42mm




Structure image

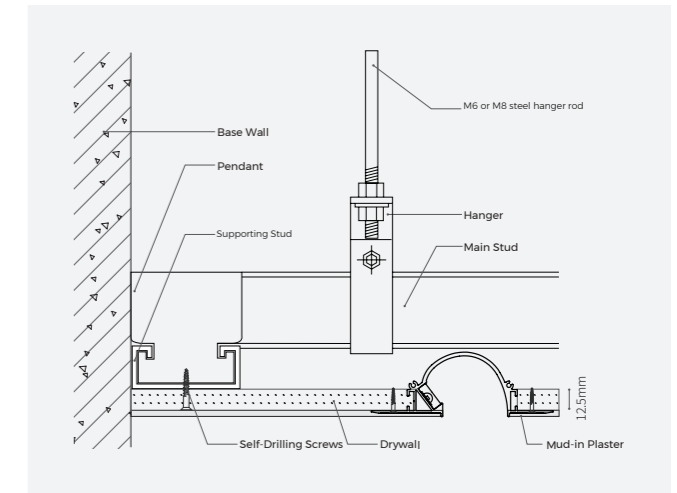

Effect image

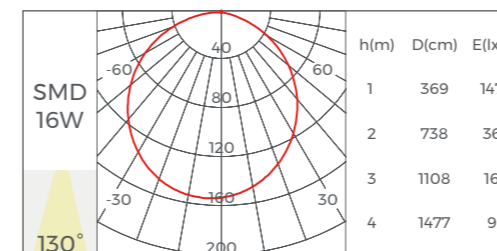


LR3924

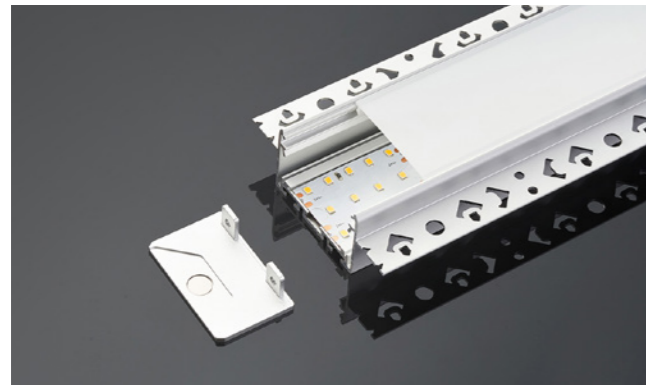

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

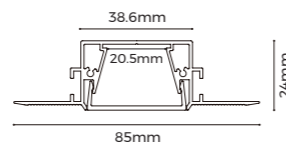

Profile Components

Profile	L2500×W85×H24mm	
Diffuser	L2500×W34.2×H10.2mm	
Holeless end caps	EC-LR3924 L38.6×W24×H2mm	

Installation Accessories


Screw	CL-O1 M3.5×40mm	
-------	--------------------	--

Light Source


Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M	24V	20W/M	2500x20x15mm	280LEDs	14LEDs/50mm



Structure image

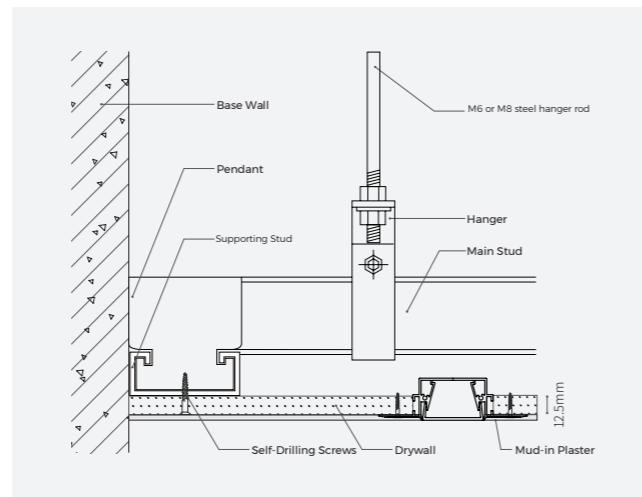

Effect image

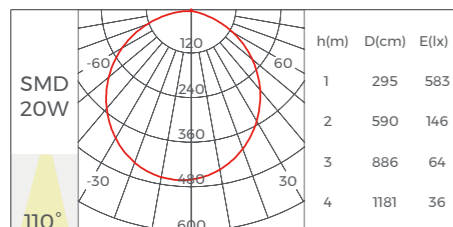


LR5535(A)



Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components

Profile	L2500×W95×H35mm	
Diffuser	L2500×W48.8×H5.6mm	
Flexible diffuser	CV-LS5470FD(F) L50000×W48.8×H5.6mm	
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000×W48.8×H5.6mm	
Holeless end caps	EC-LR5535(A) L55×W35×H22mm	

Installation Accessories


Screw	CL-O1 M3.5×40mm	
-------	--------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500×34×15mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	>80	2740LM/m	24V	50W/m	2500×34×15mm	560LEDs	28LEDs/50mm

Rigid module

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	499×36×5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	>80	2740LM/m	24V	50W/m	499×36×5.6mm	560LEDs	28LEDs/50mm

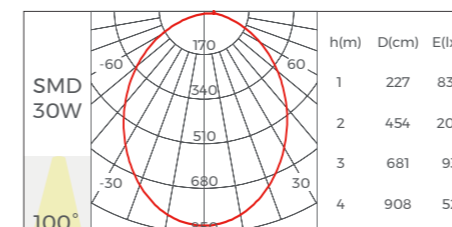


Splicing Accessories

180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splicing bar	EX-T7 50×9×22.5mm				

Corners

"L"-type	L90-LR5535(A) 107×107×35mm	
"L"-type(inward)	L90N-LR5535(A) 100×100×95mm	
"L"-type (outward)	L90W-LR5535(A) 100×100×95mm	
"T"-type	T90-LR5535(A) 150×107×35mm	
"X"-type	X90-LR5535(A) 150×150×35mm	

LR5535(B)

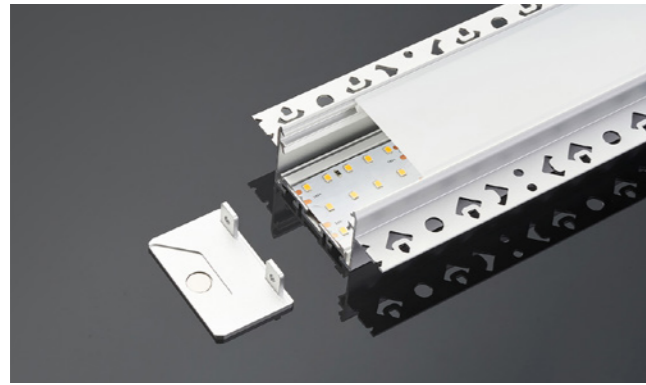


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W95×H35mm	
Diffuser	L2500×W48.8×H5.6mm	
Flexible diffuser	CV-LS5470FD(F) L50000×W48.8×H5.6mm	
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000×W48.8×H5.6mm	
Holeless end caps	EC-LR5535(B) L55×W35×H22mm	



Installation Accessories

Screw	CL-01 M3.5×40mm	
-------	--------------------	--



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500×34×1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	>80	2740LM/m	24V	50W/m	2500×34×1.5mm	560LEDs	28LEDs/50mm

Rigid module

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	499×36×5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	>80	2740LM/m	24V	50W/m	499×36×5.6mm	560LEDs	28LEDs/50mm

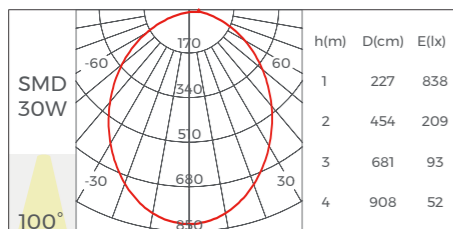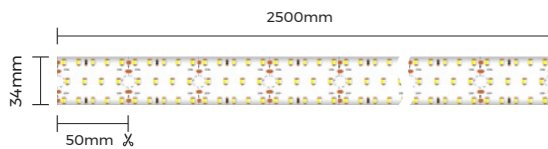

Splicing Accessories

180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splicing bar	EX-17 50×9×22.5mm				

Corners

"L"-type	L90-LR5535(B) 107×107×35mm	
"L"-type(inward)	L90N-LR5535(B) 100×100×93mm	
"L"-type (outward)	L90W-LR5535(B) 100×100×93mm	
"T"-type	T90-LR5535(B) 150×107×35mm	
"X"-type	X90-LR5535(B) 150×150×35mm	

LG1616C(N)




Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W16×H16mm	
Diffuser	L2500×W19.4×H6mm	
Holeless end caps	EC-LG1616C(N) L16×W16×H6.5mm	
End cap with hole	EC-LG1616C(N) L16×W16×H6.5mm	




Installation Accessories


Ceiling clip	CP-13 15×17×17mm	
--------------	---------------------	--

Light Source


Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×12mm	140LEDs	7LEDs/ 50mm



Structure image

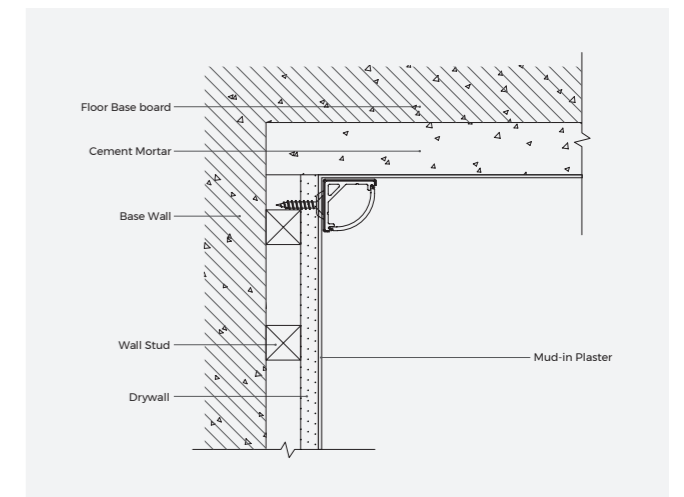

Effect image

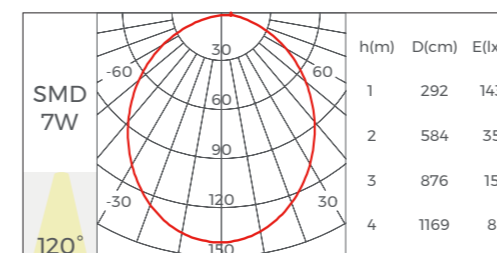

LG1616K(N)




Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W16×H16mm	
Diffuser	L2500×W14.6×H4.6mm	
Holeless end caps	EC-LG1616K(N) L16×W16×H6.5mm	
End cap with hole	EC-LG1616K(N) L16×W16×H6.5mm	




Installation Accessories


Ceiling clip	CP-13 15×17×17mm	
--------------	---------------------	--

Light Source


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×12mm	140LEDs	7LEDs/ 50mm




Structure image

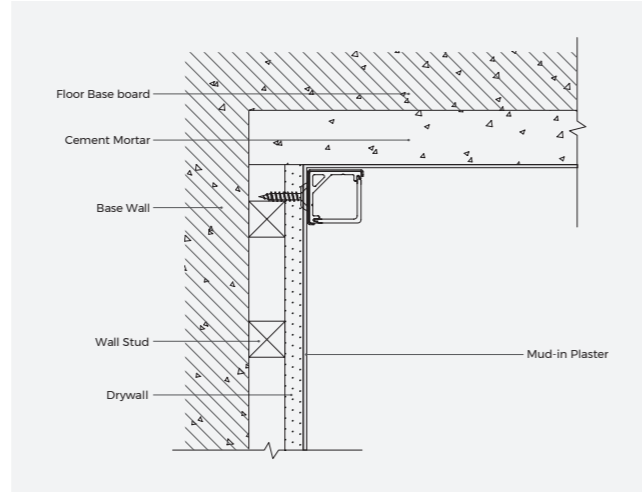

Effect image

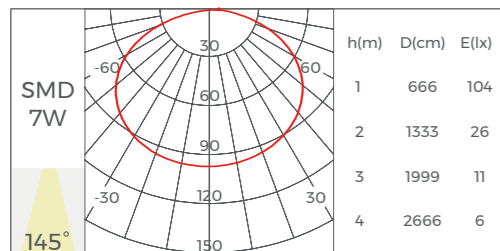

LG2020C

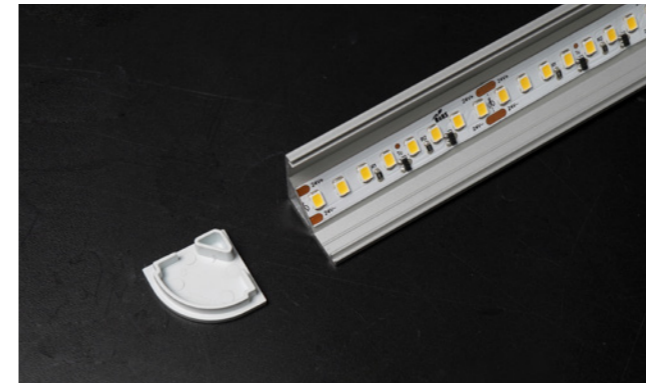


Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W20×H20mm	
Diffuser	L2500×W25.4×H7.7mm	
Holeless end caps	EC-LG2020C L20×W20×H6.5mm	
End cap with hole	EC-LG2020C L20×W20×H6.5mm	




Installation Accessories


Ceiling clip	CP-50 L21.1×W21.1×H15mm	
--------------	----------------------------	--

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×12mm	280LEDs	14LEDs/ 50mm



Structure image

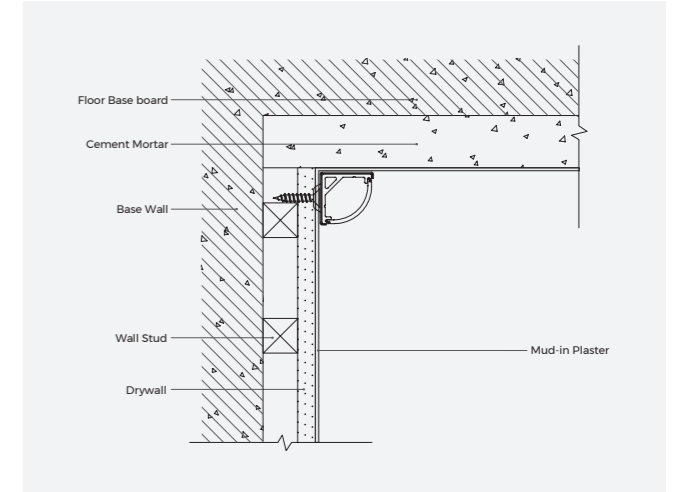

Effect image



LG3030C




Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W30×H30mm	
Diffuser	L2500×W28.9×H28.9mm	
Holeless end caps	EC-LG3030C L30×W30×H5mm	
End cap with hole	EC-LG3030C L30×W30×H5mm	




Installation Accessories

Ceiling clip	CP-14 31×31×14mm	
--------------	---------------------	--


Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm

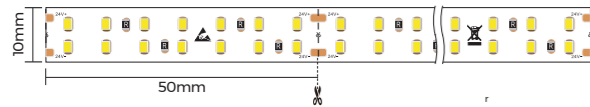

Structure image

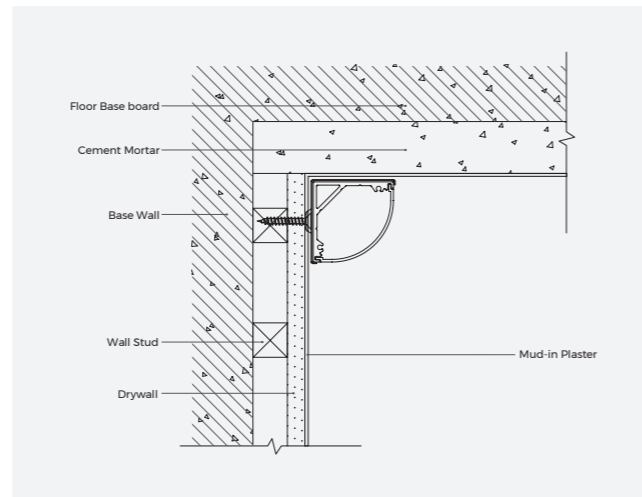

Effect image

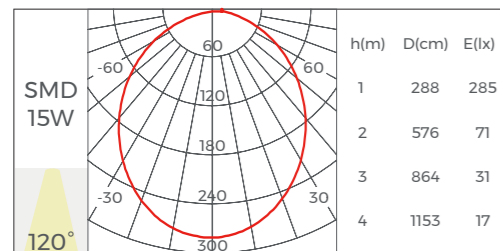

SK6013(B)



Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile L2500×W13.2×H60mm



Diffuser L2500×W10.3×H6.8mm



Installation Accessories



Screw CL-01
M3.5×40mm




Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm

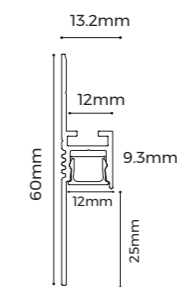

Structure image

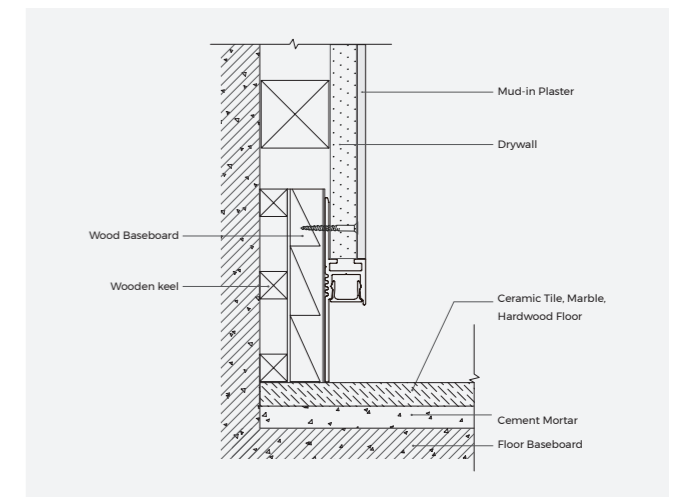

Effect image

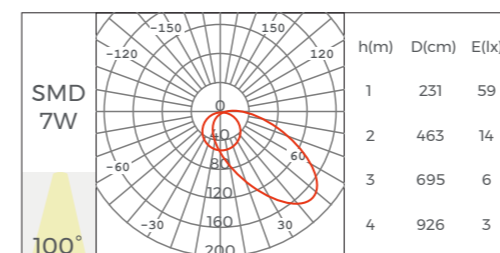

SK8513(B)



Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W13.2×H85mm	
Diffuser	L2500×W10.3×H6.8mm	



Installation Accessories

Screw	CL-01 M3.5×40mm	
-------	--------------------	--


Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




Structure image

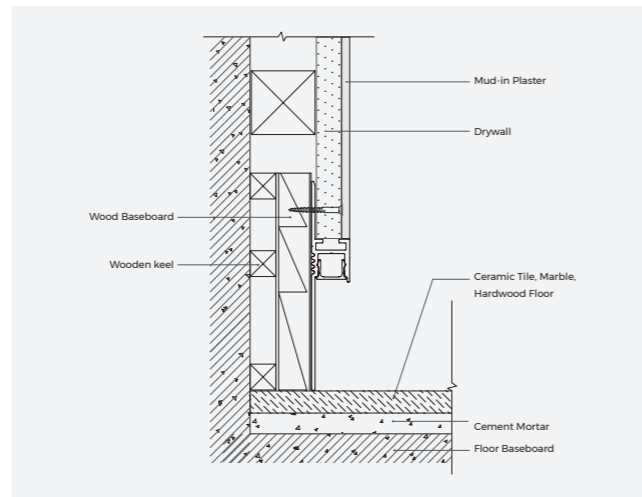

Effect image

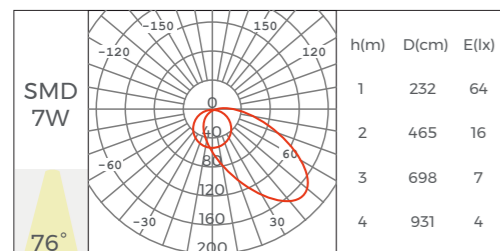

LS2126

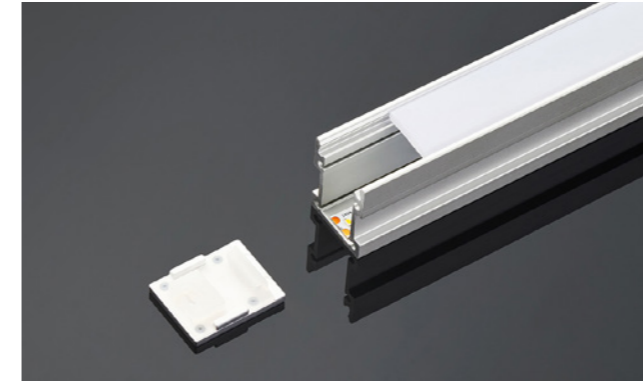

Basic Parameters

Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10



Profile Components

Profile	L2500×W21.4×H27mm	
Diffuser	L2500×W18×H3.4mm	
Holeless end caps	EC-LS2126 L27×W21.4×H5mm	
End cap with hole	EC-LS2126 L27×W21.4×H5mm	


Light Source

Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




Structure image

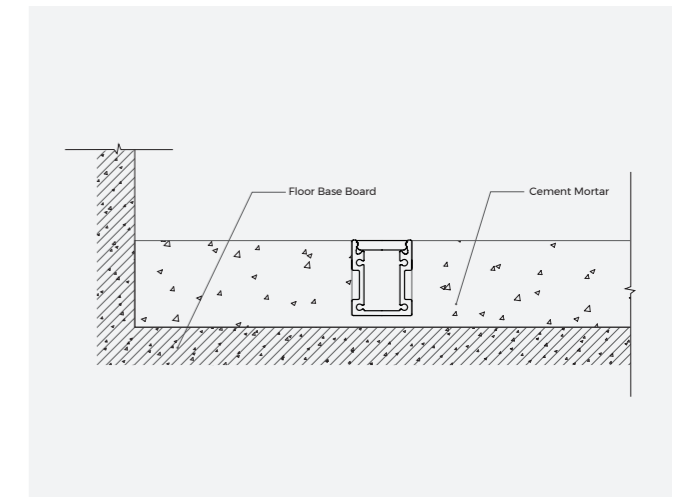

Effect image

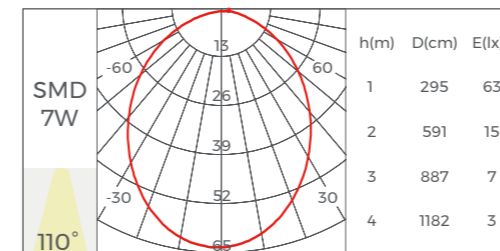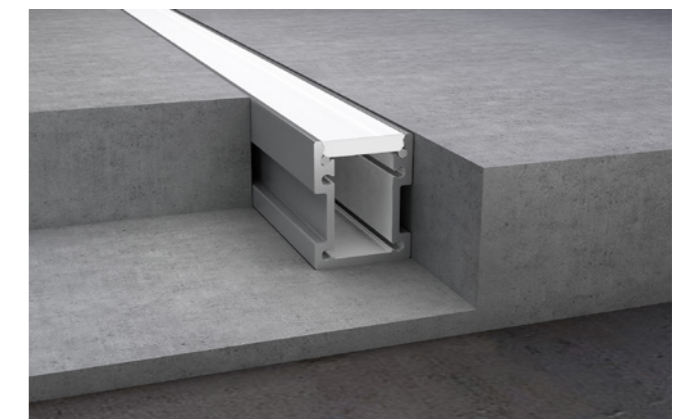

LE2711

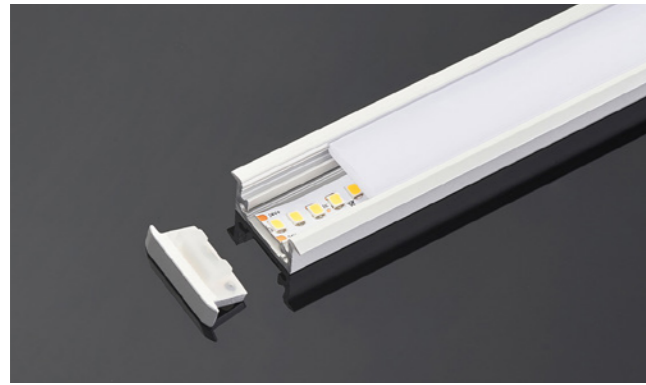

Profile Components

Profile	L2500×W27×H11mm	
Diffuser	L2500×W18×H3.4mm	
Holeless end caps	EC-LE2711 L27.2×W11×H7.8mm	
End cap with hole	EC-LE2711 L27.2×W11×H7.8mm	

Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/ M	24V	16.2W/ M	5000x10x16mm	168LEDs	7LEDs/ 42mm




Basic Parameters



Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10

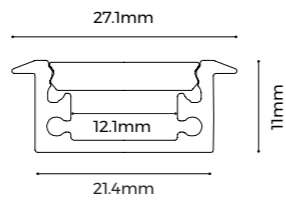

Structure image

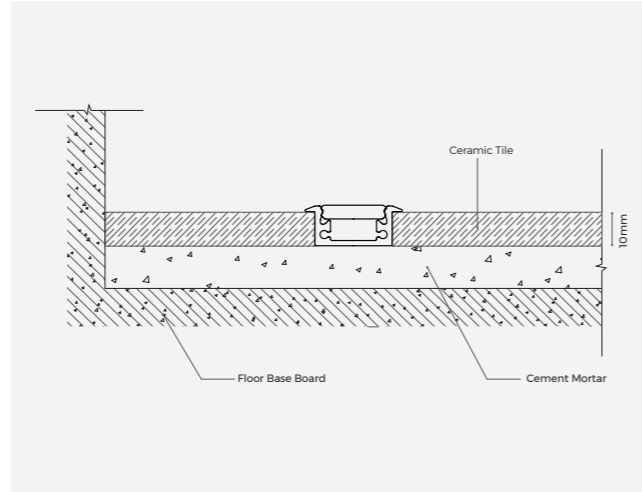

Effect image

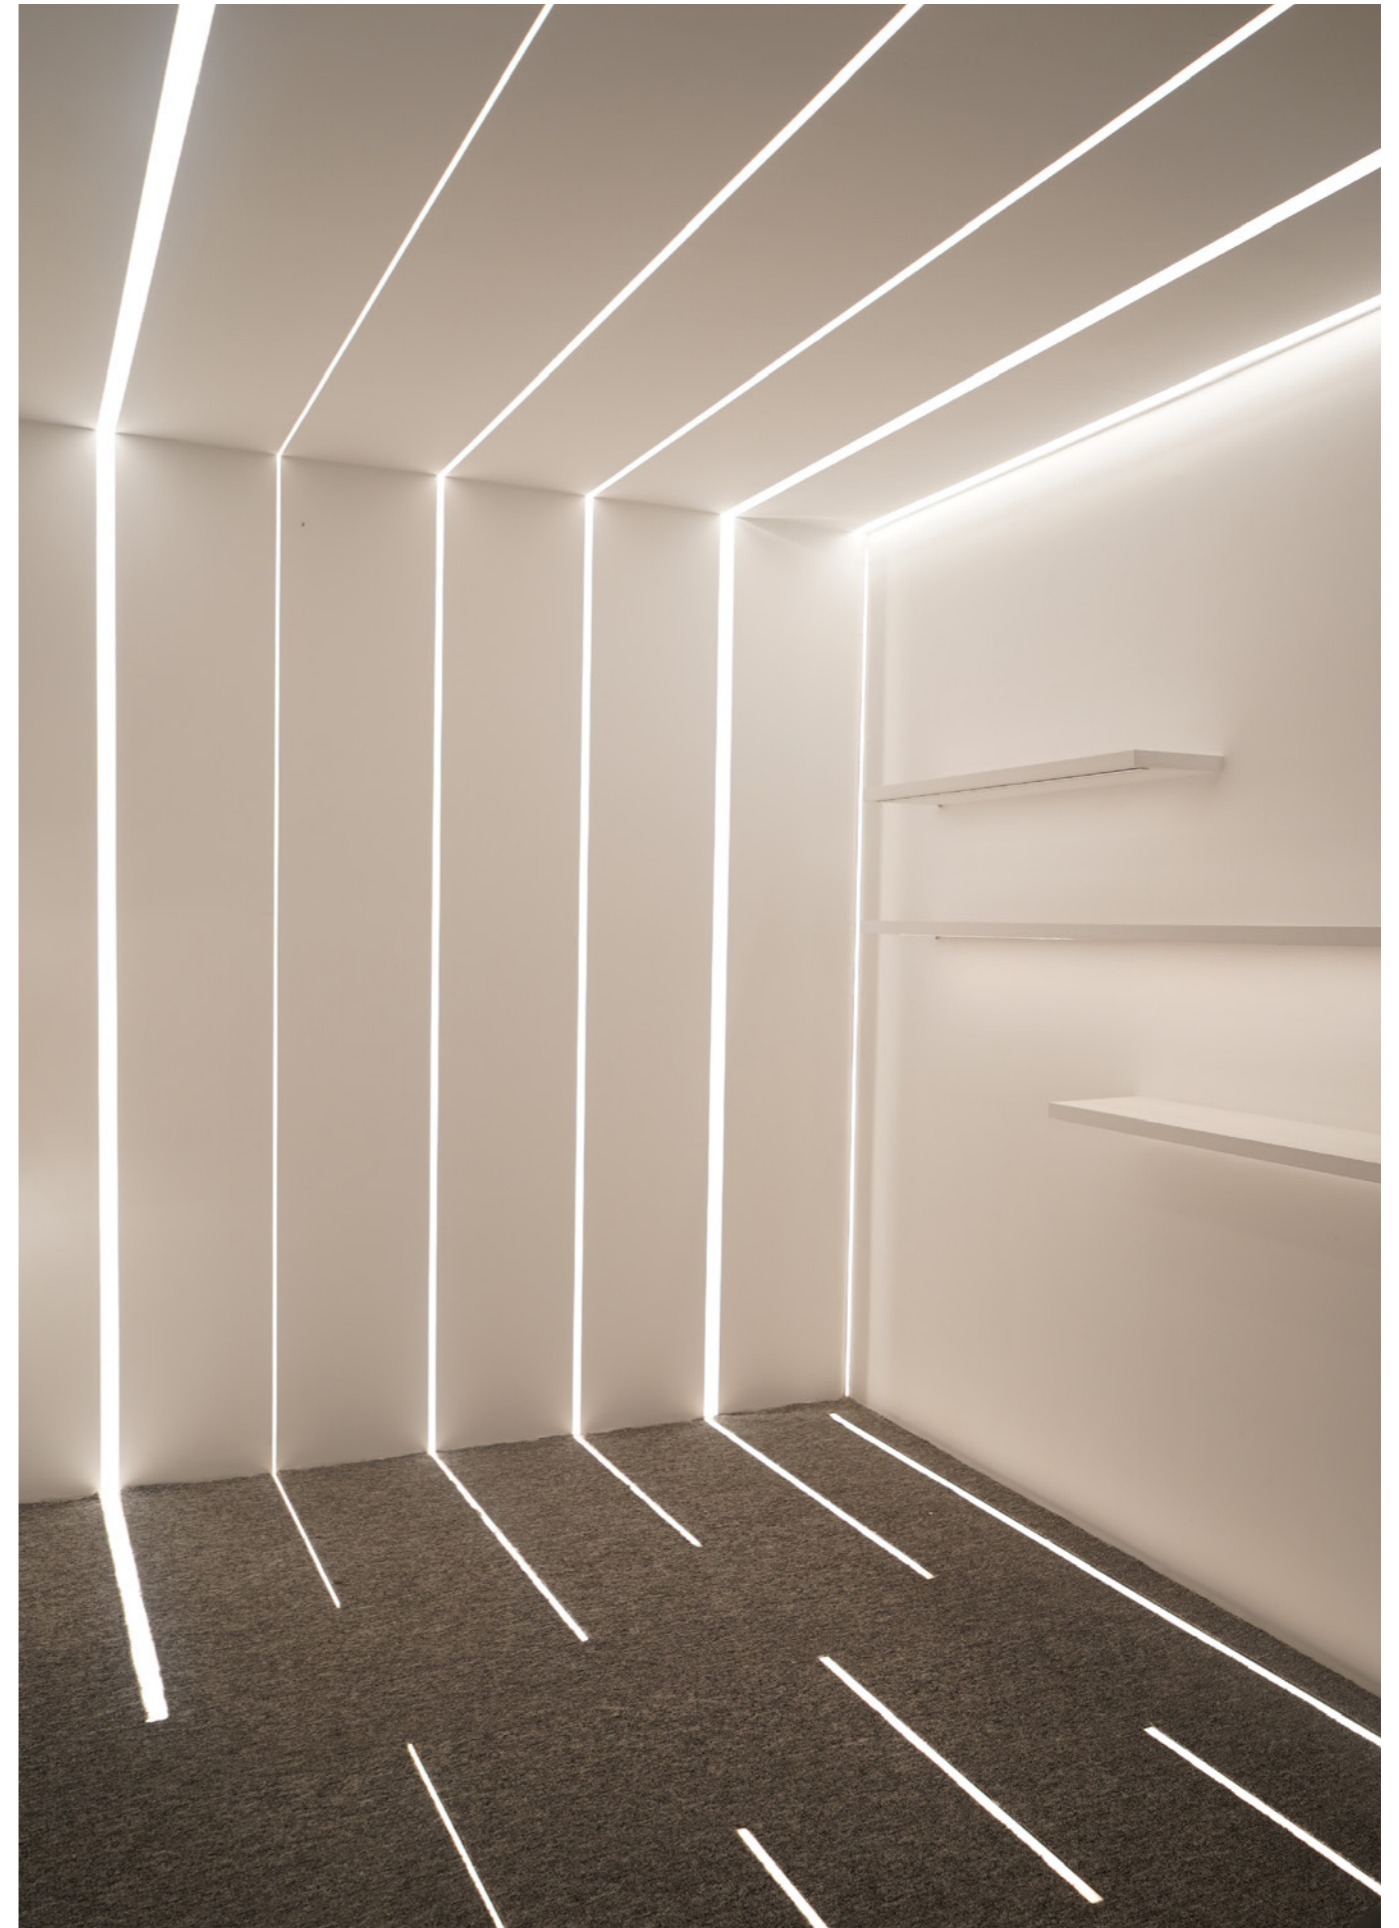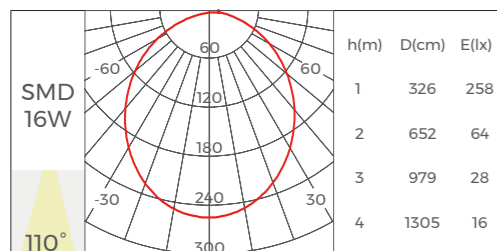



LED LINEAR &
COMMERCIAL
LIGHTING



Tel: +86-755-2923-1888

E-mail: colors@colorsled.com

Web: www.colorsled.com

Add: 17F, Block B, Building 2, North of Skyworth

Inno Valley, Shiyan town, Bao'an District, Shenzhen