

产品规格书









SKYLINE

— 天 际 线 —



设计原理

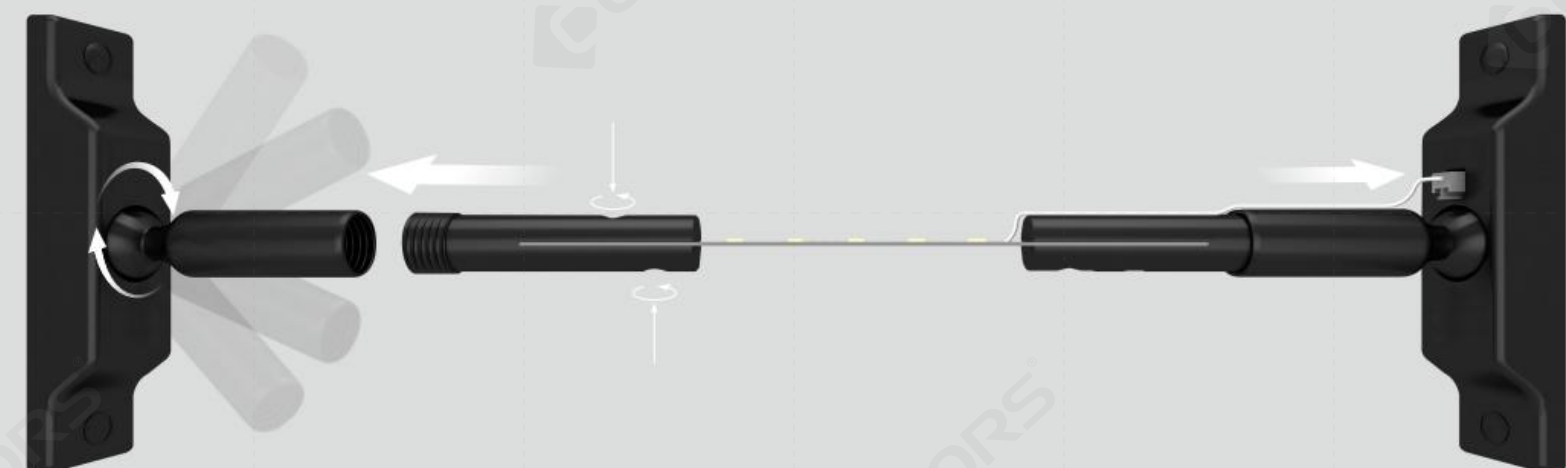

应用指引

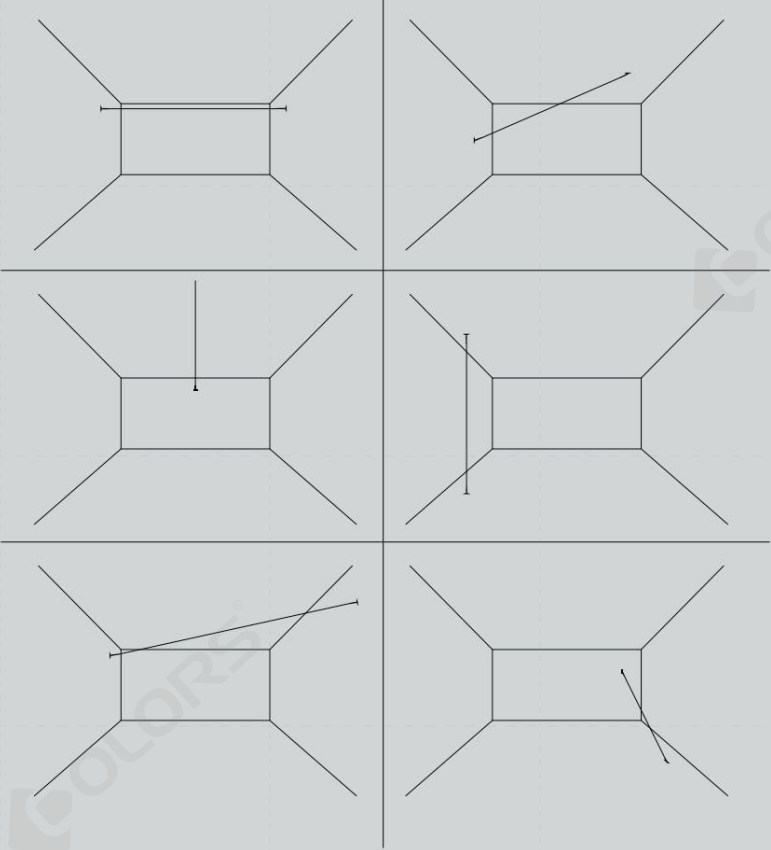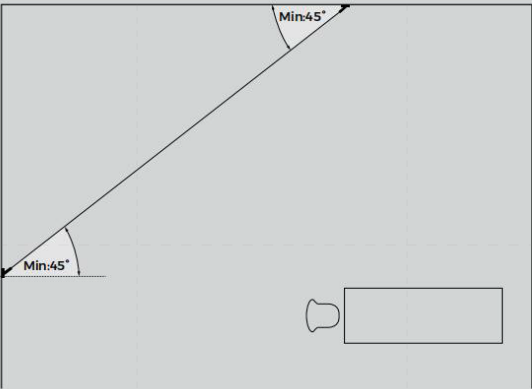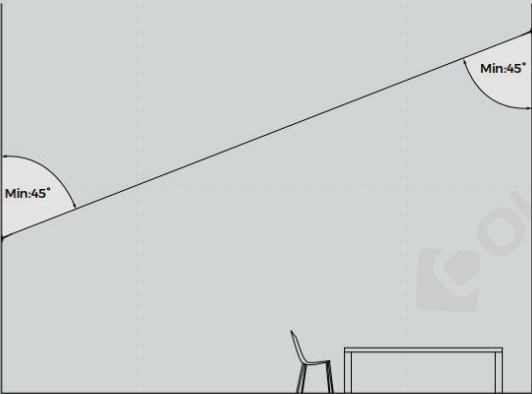


安装指引

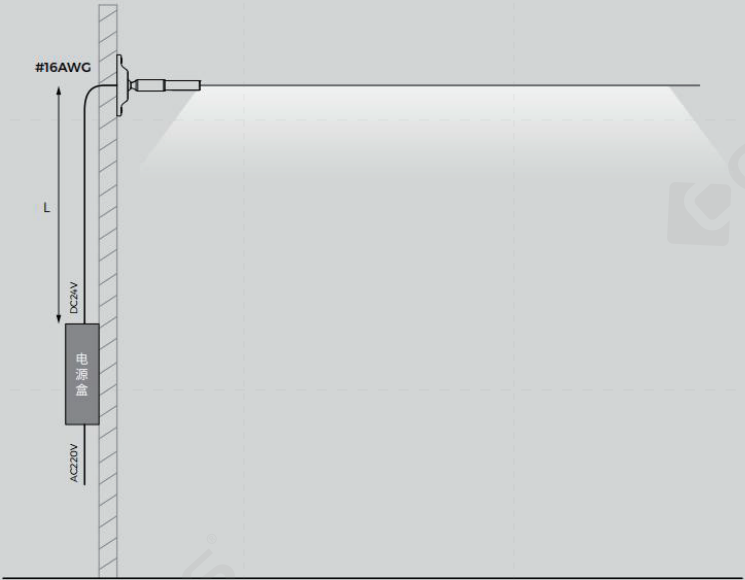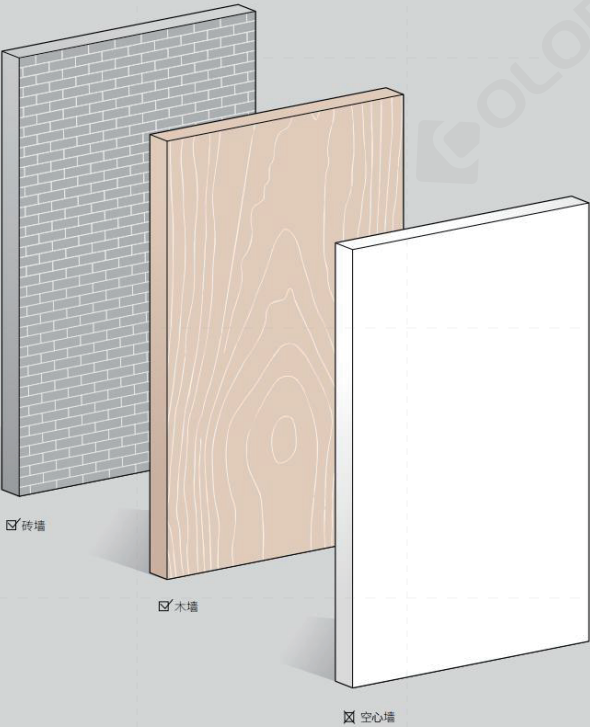



SKY-06A: Lmax=9M; 13.5W/m; DC24V
SKY-06B: Lmax=9M; 9.6W/m; DC24V
SKY-12C: Lmax=7M; 8.7W/m; DC24V
SKY-20C: Lmax=5M; 8.7W/m; DC24V
*请根据实际使用长度计算所需电源功率

五种型号


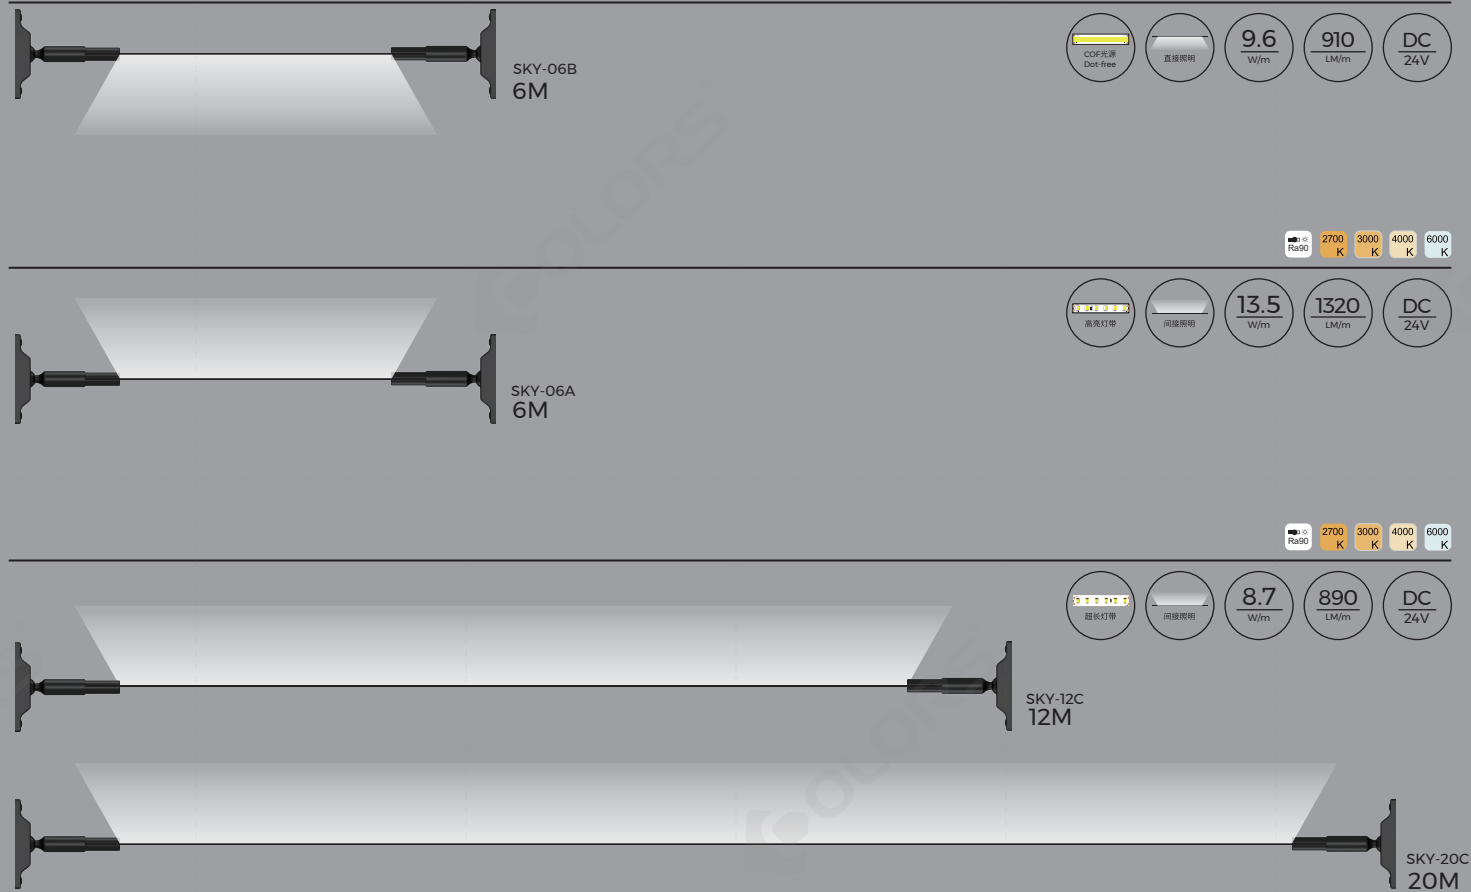


型号	SKY-06B	SKY-06A	SKY-12C	SKY-20C
长度	6M	6M	12M	20M
光源类型				
裁剪单元	50mm	50mm	50mm	50mm
输入电压	DC24V	DC24V	DC24V	DC24V
色温				
显指	>90	>90	>90	>90
功率	9.6W/m	13.5W/m	8.7W/m	8.7W/m
流明	910LM/m	1320LM/m	890LM/m	890LM/m
颜色				



光电参数

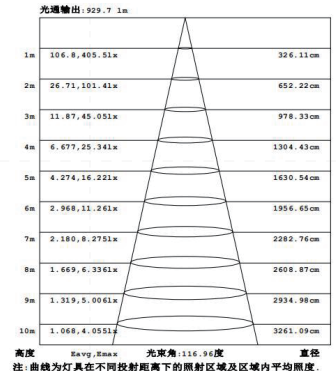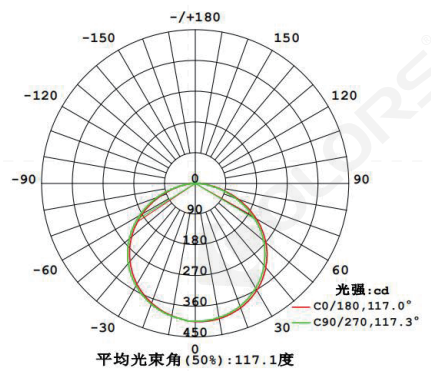

A

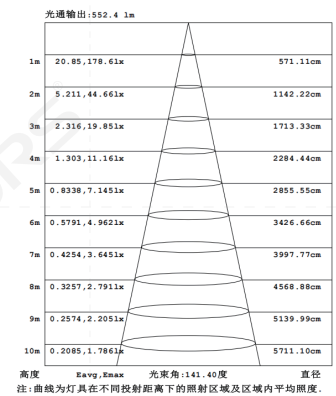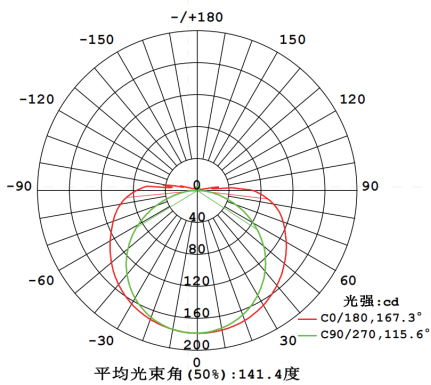

B

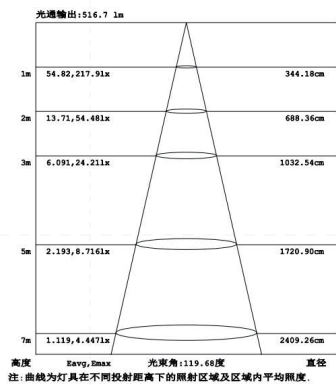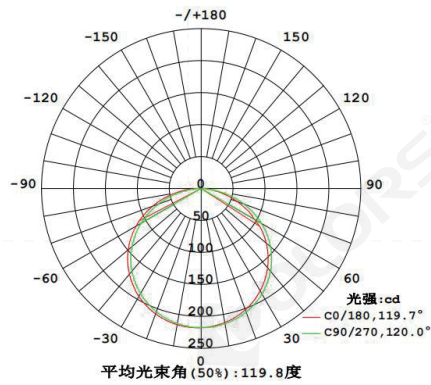


C

包装信息



部件	包材类型	尺寸(mm)	款型	毛重	装箱数量
单箱	纸盒	352*346*72mm	6m	2kg	1pcs
整箱	纸箱	365*360*295mm	6m	8kg	4pcs
单箱	纸盒	352*346*72mm	12m	2.52kg	1pcs
整箱	纸箱	365*360*295mm	12m	10.08kg	4pcs
单箱	纸盒	352*346*72mm	20m	3.15kg	1pcs
整箱	纸箱	365*360*295mm	20m	12.6kg	4pcs

尺寸 (mm)

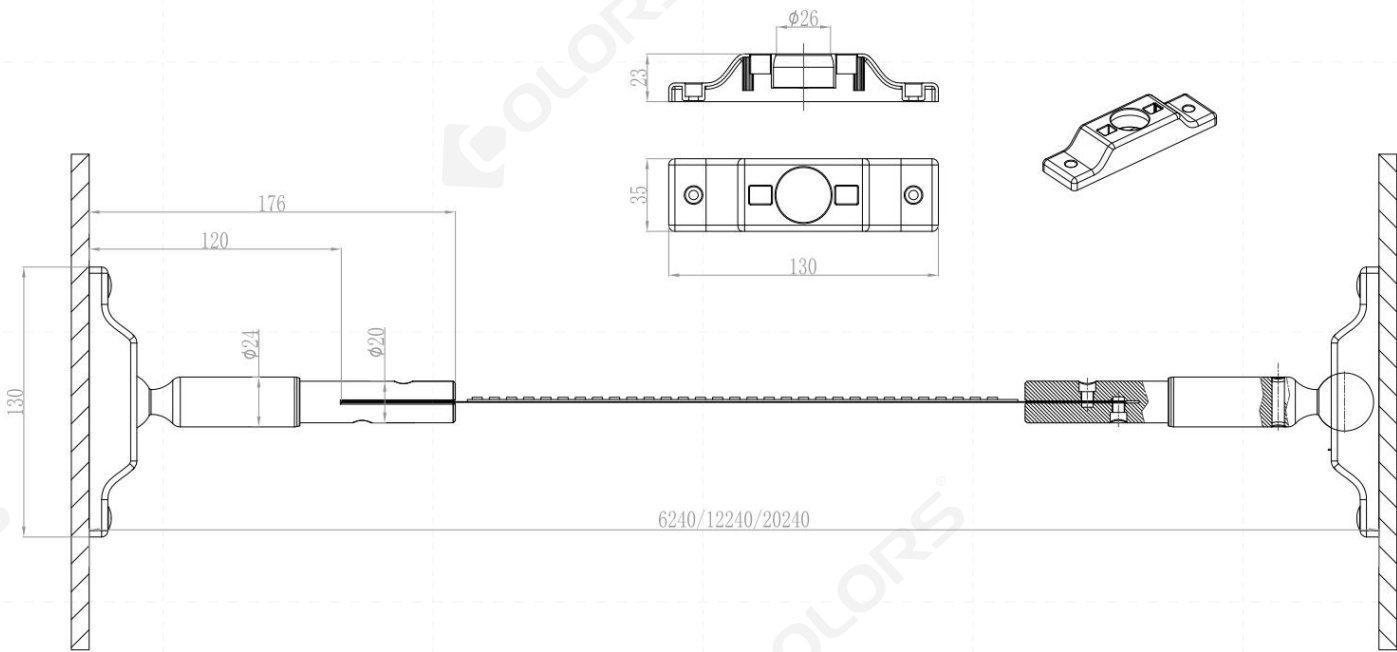

下单代码

产品类别			长度		光源类型		显指		色温		颜色	
Skyline	SKY	-	6000mm	06	D8120-24V-8mm	A	>90	9	2700K	27	黑色	B
			12000mm	12	DRFI0-24V-8mm	B			3000K	30		
			20000mm	20	DS8120-24V-8mm	C			4000K	40		
									6000K	60		